

FIGURE 1

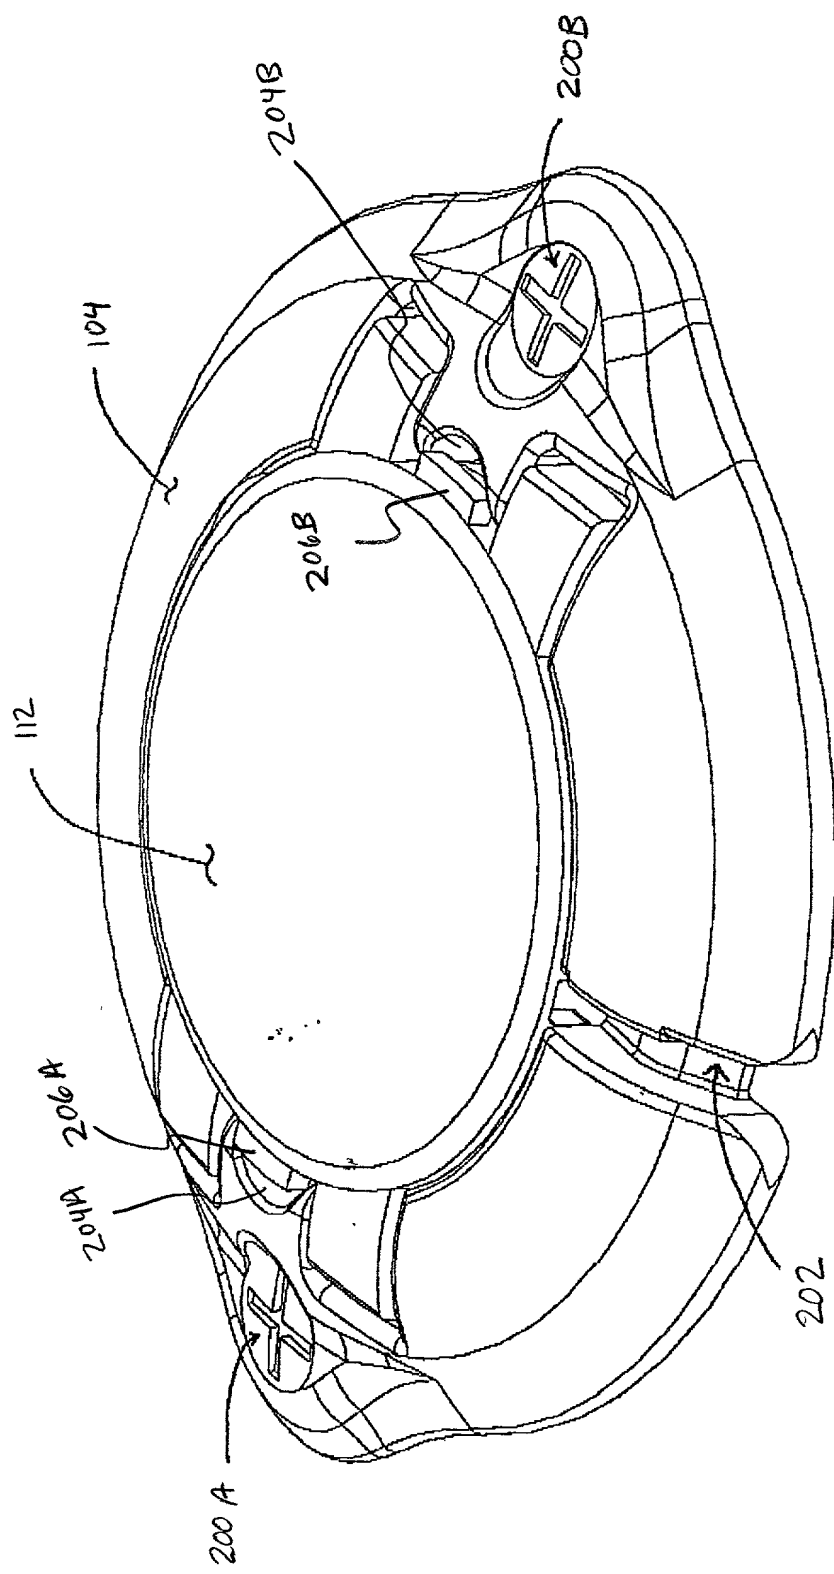
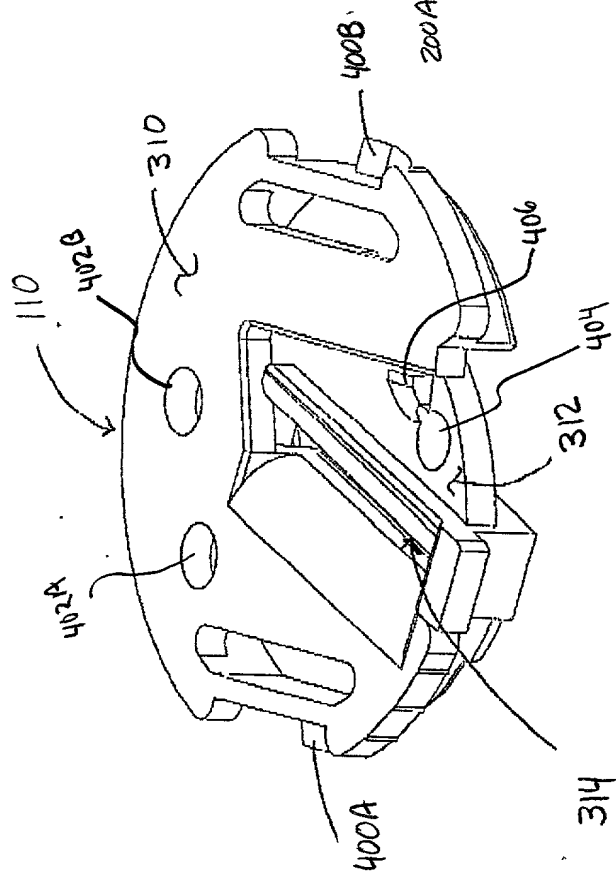
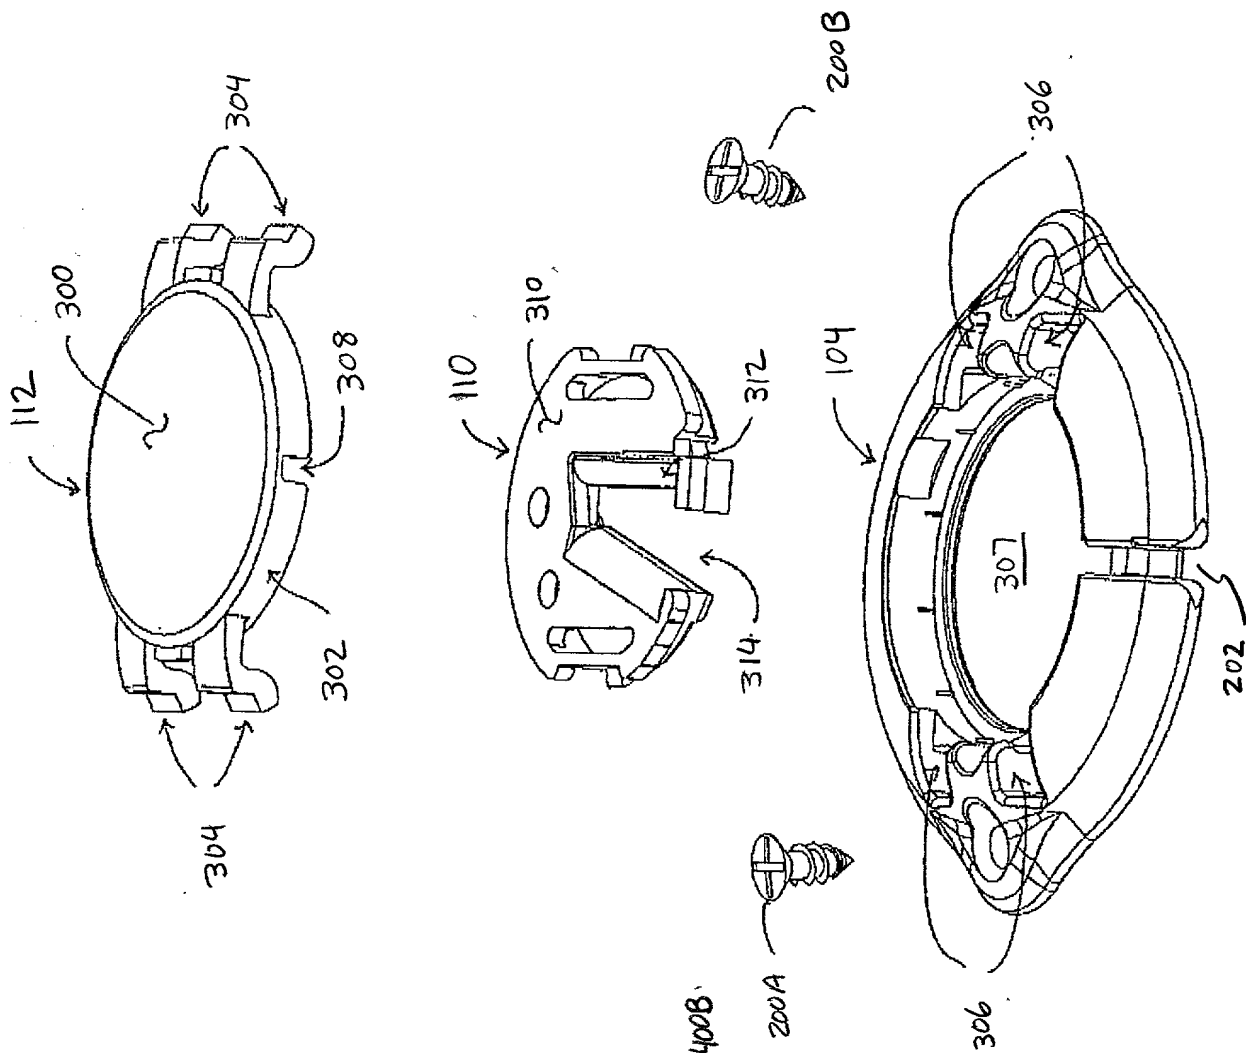


FIGURE 2



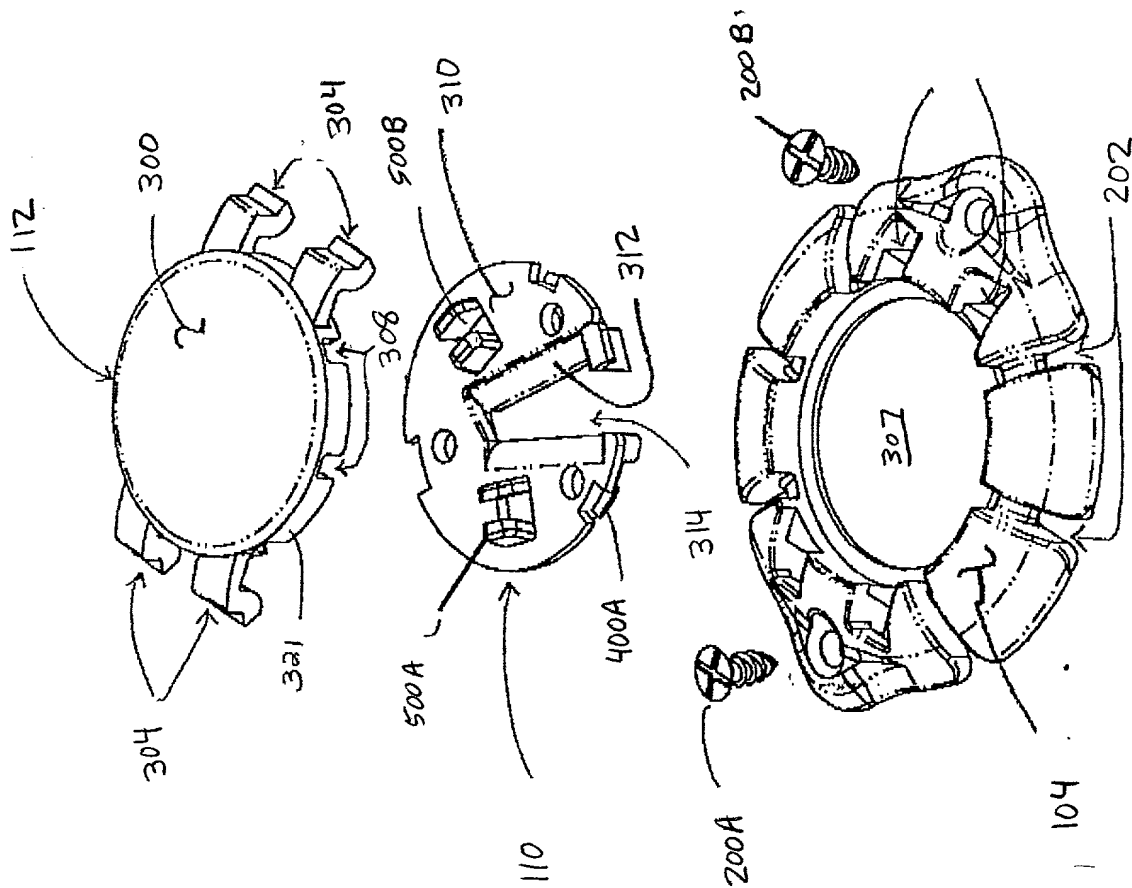


FIGURE 5

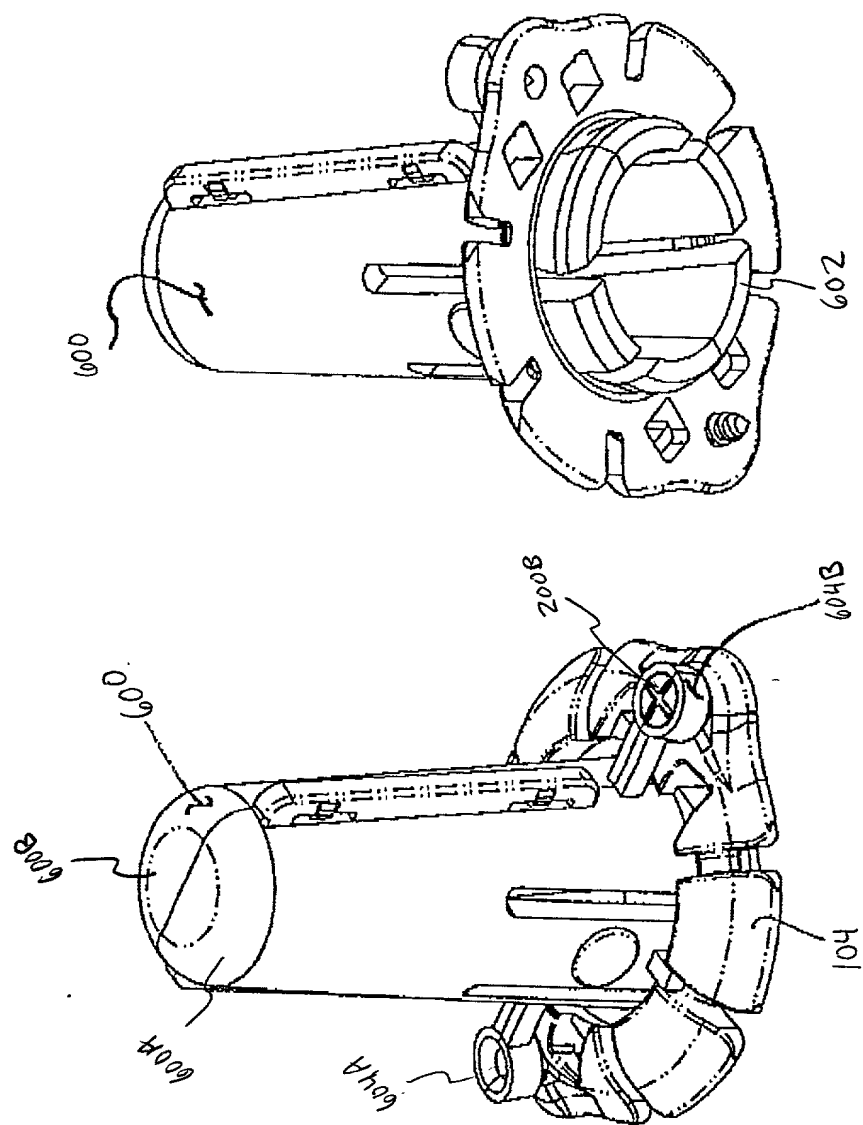


FIGURE 6

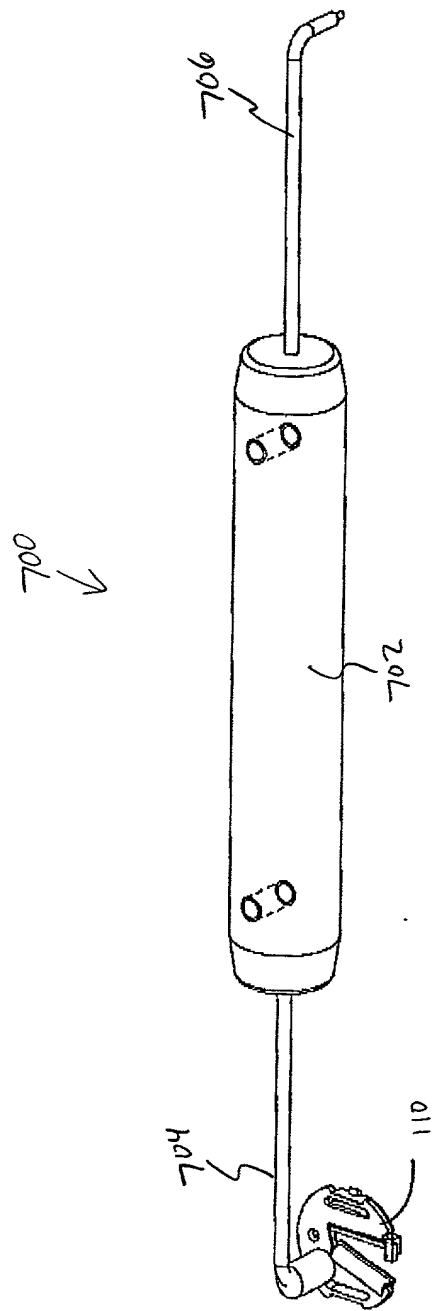


FIGURE 7

FIG. 8 is a perspective view of the first embodiment of the device, showing the outer ring 800, the inner ring 802, and the central hub 804. The device is shown in a disassembled state, with the outer ring 800 and the inner ring 802 separated from the central hub 804. The outer ring 800 is shown with a plurality of radial slots 806, and the inner ring 802 is shown with a plurality of radial slots 808. The central hub 804 is shown with a plurality of radial slots 810.

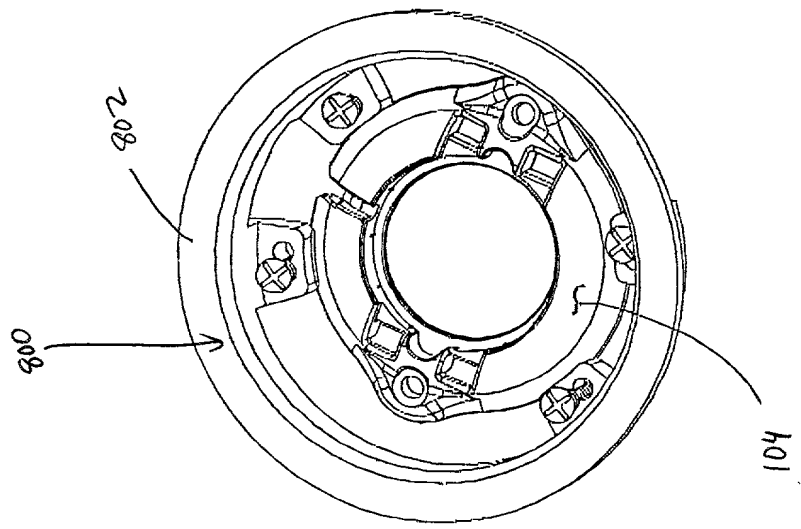


FIGURE 8

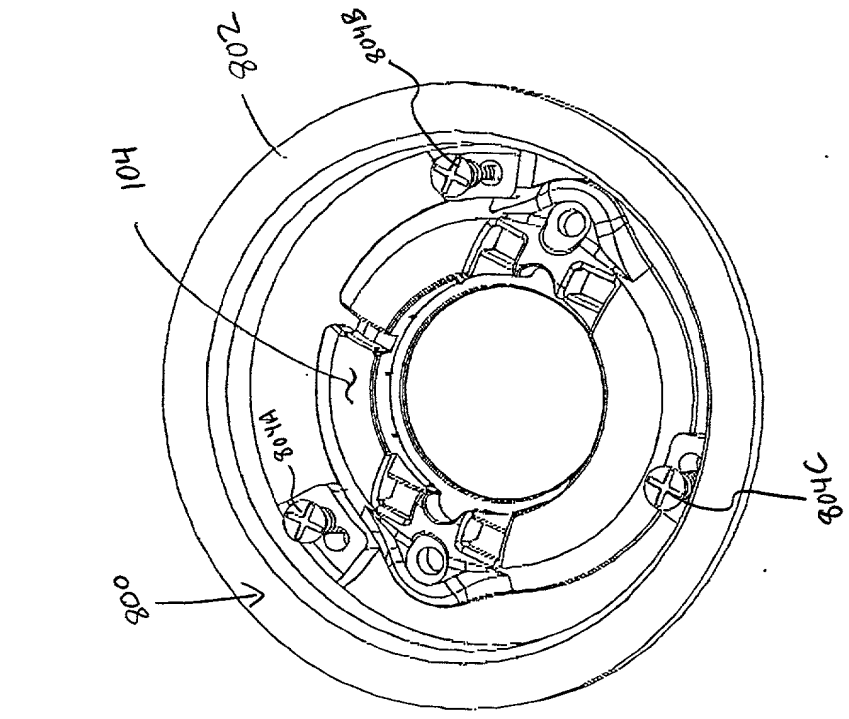


FIGURE 9

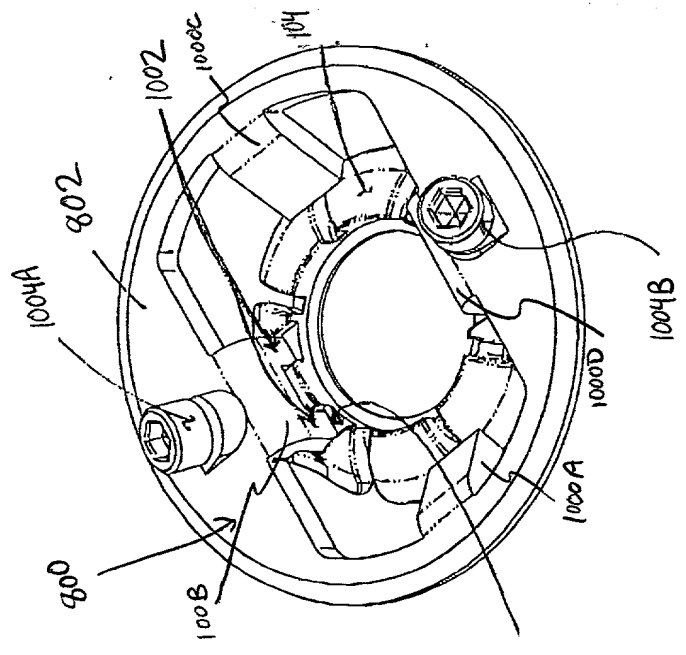
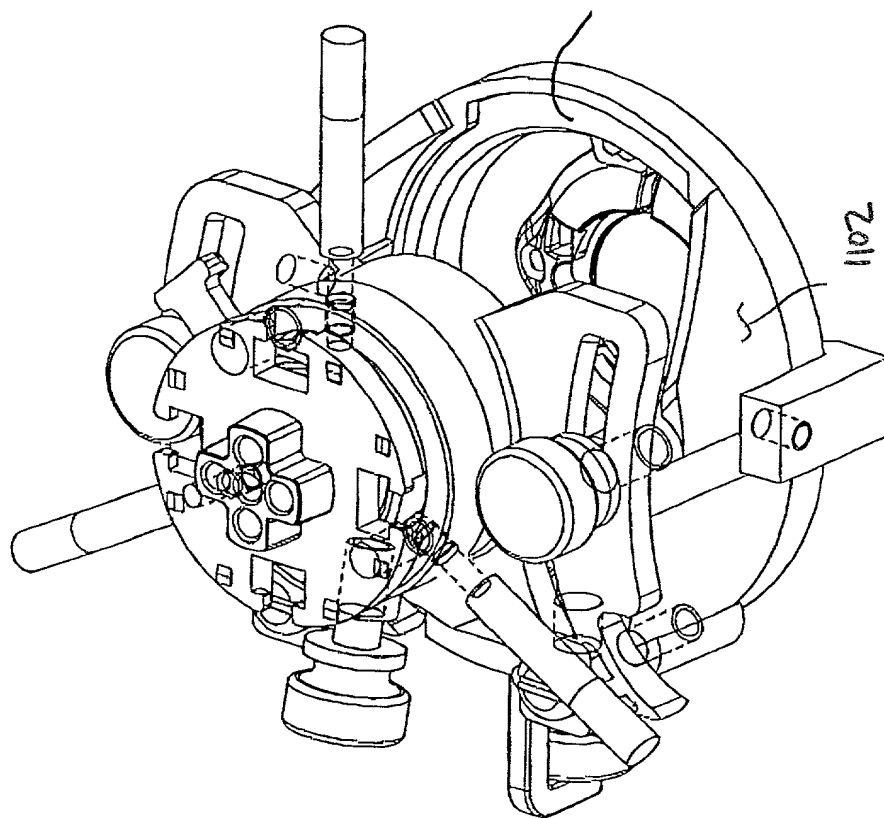
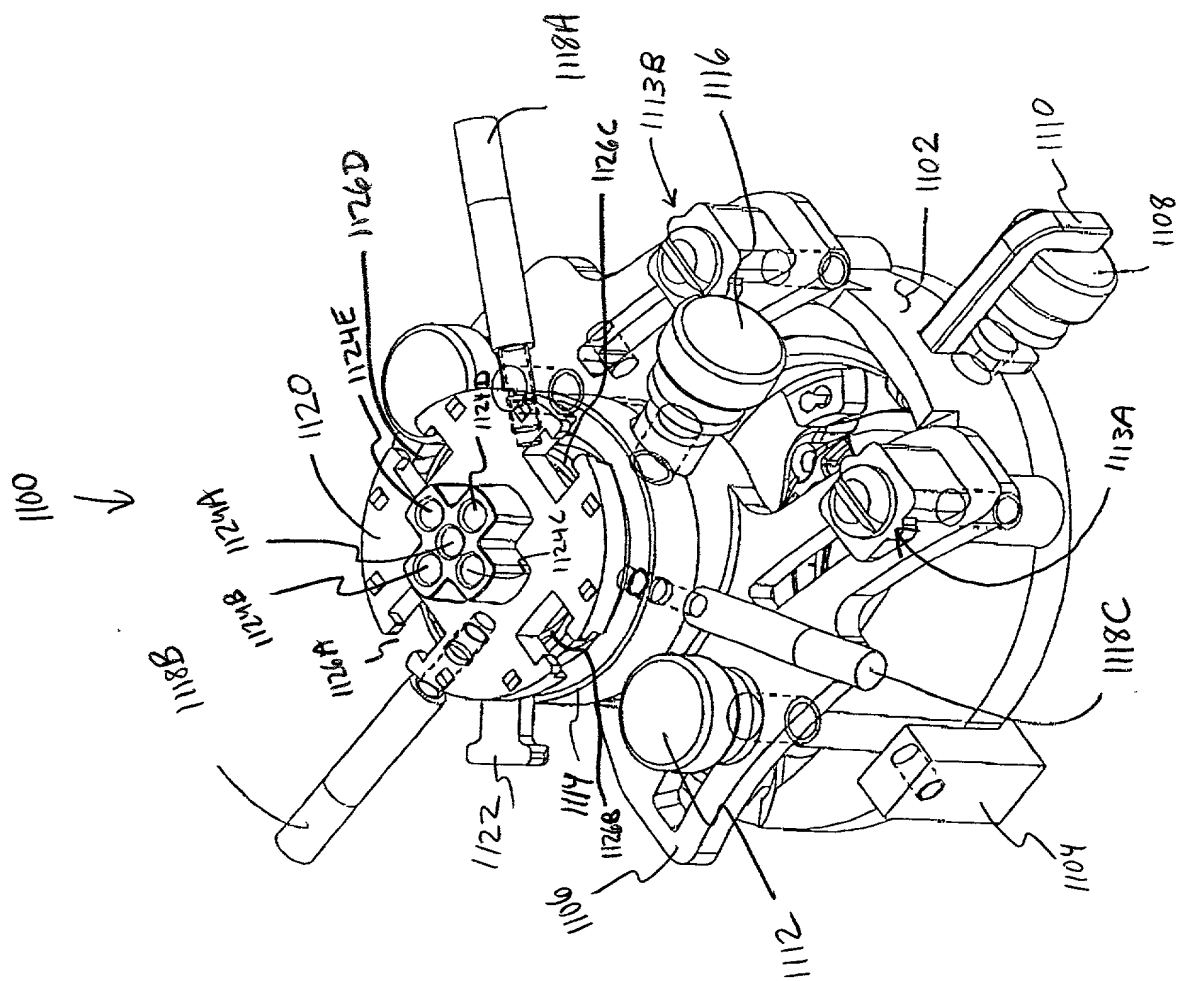


FIGURE 10





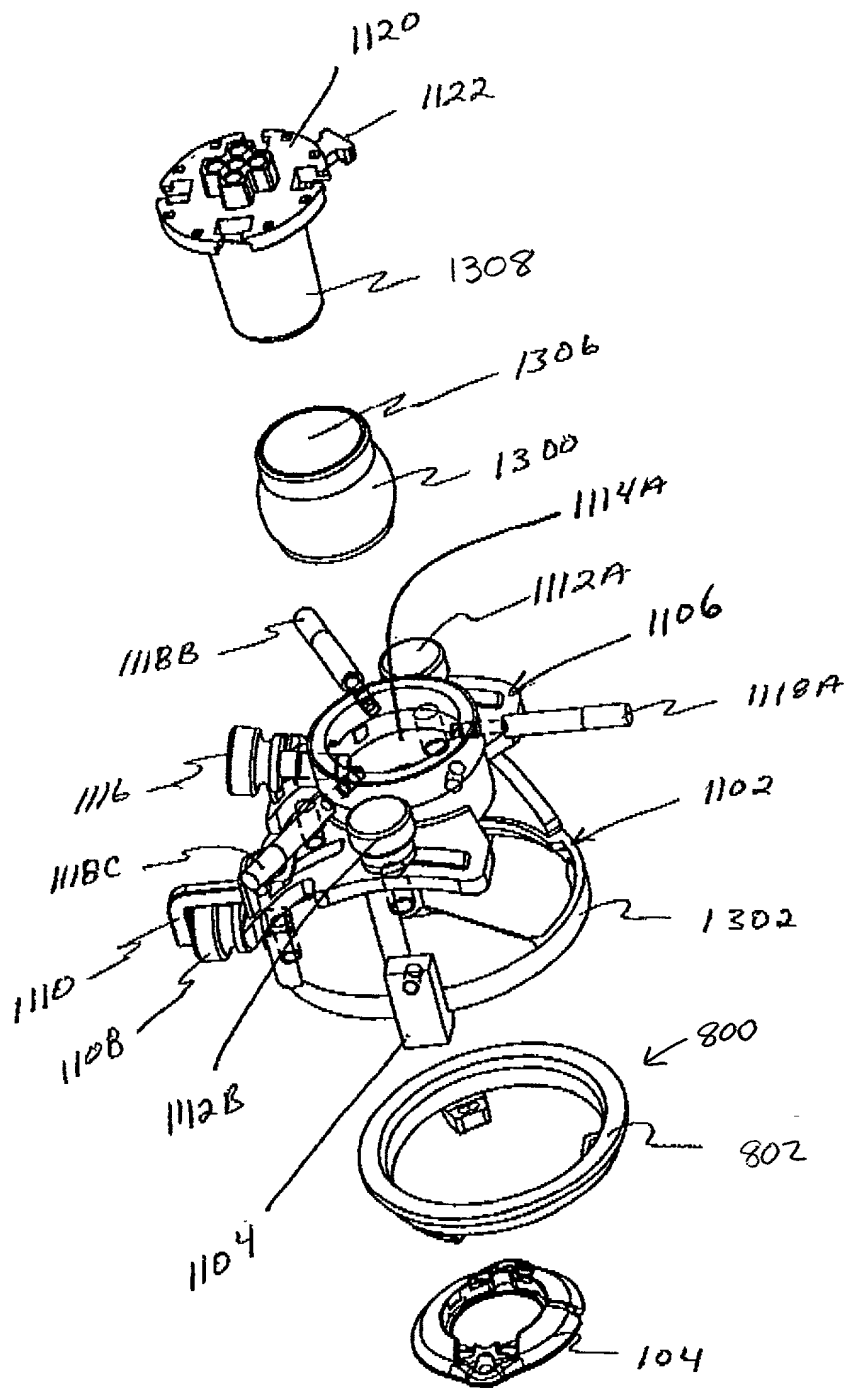


Figure 13

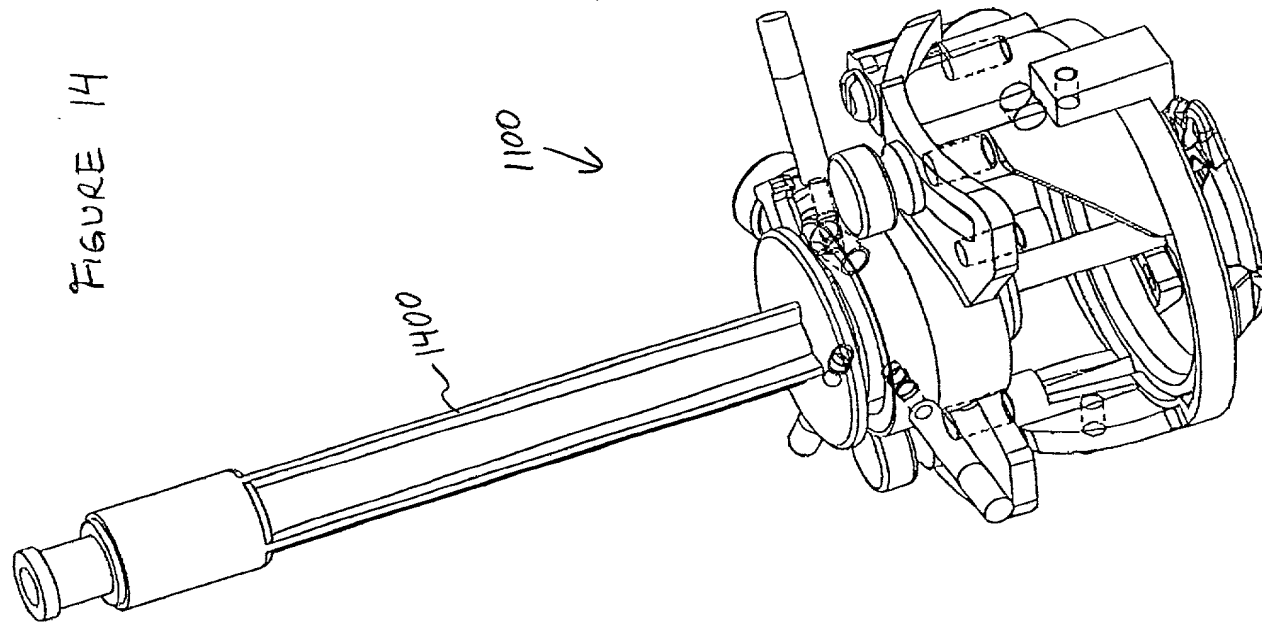


FIGURE 14

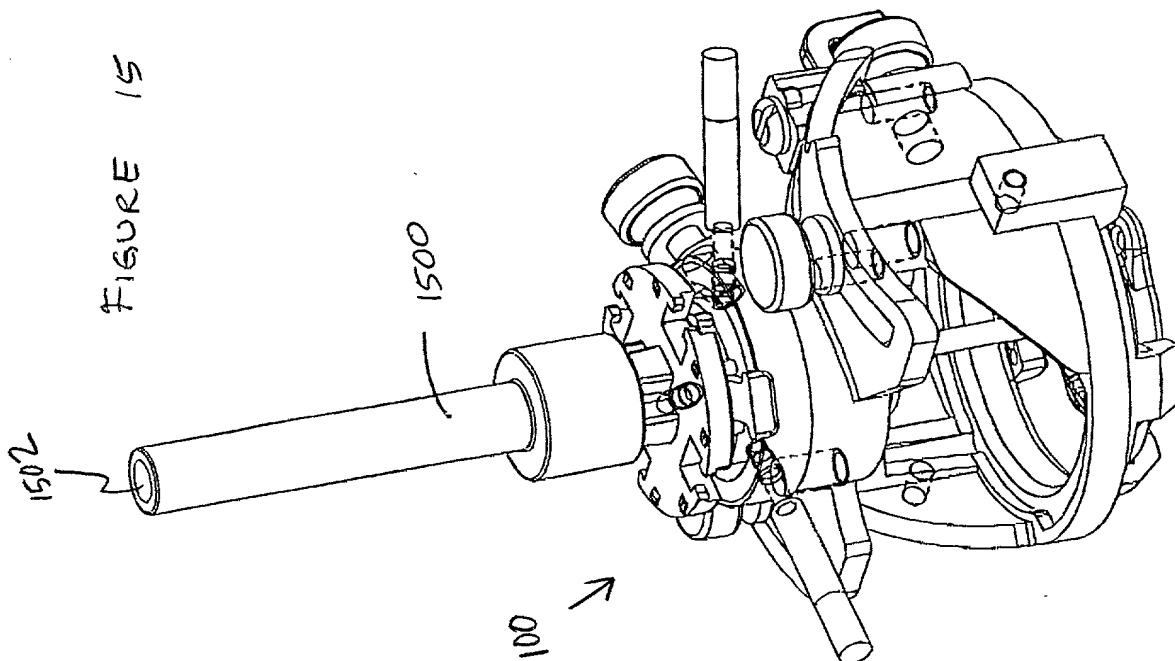


FIGURE 15

FIGURE 16

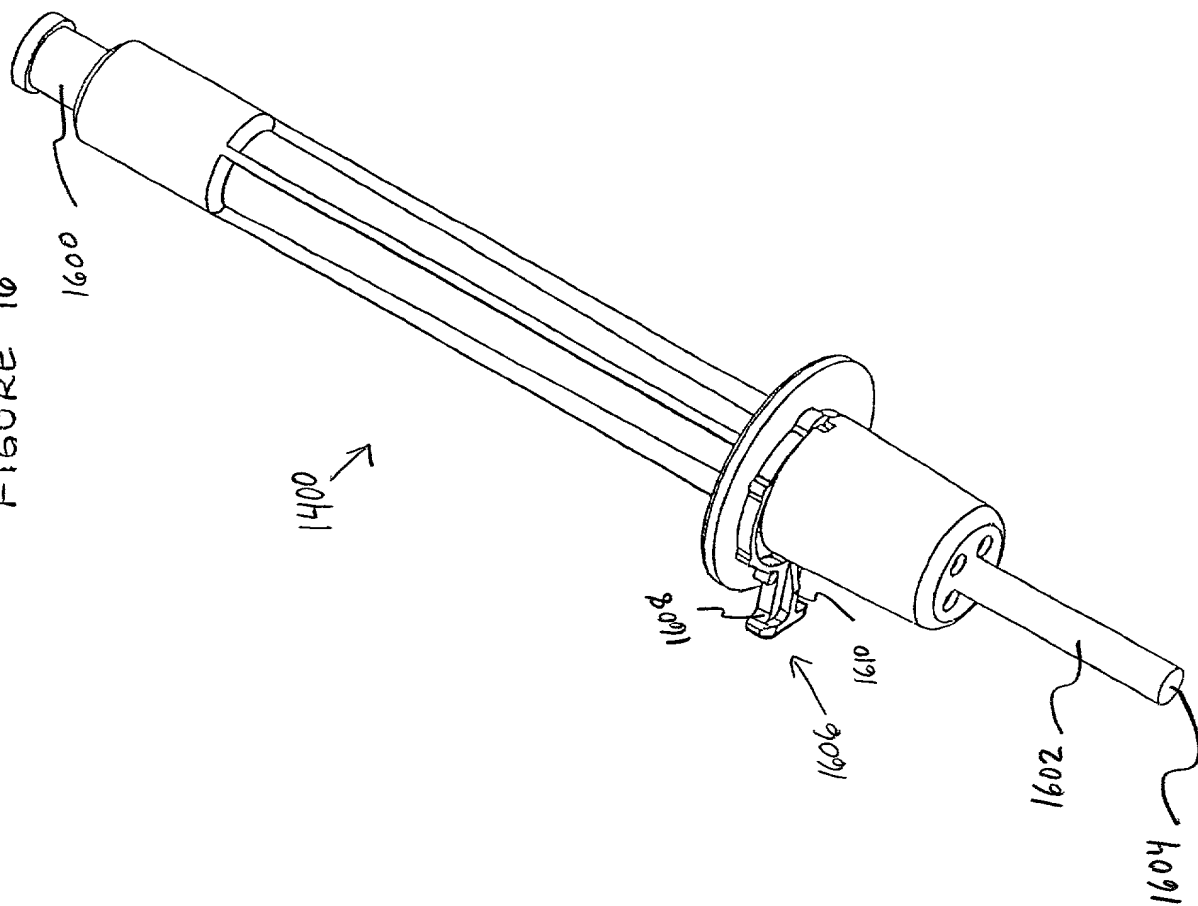
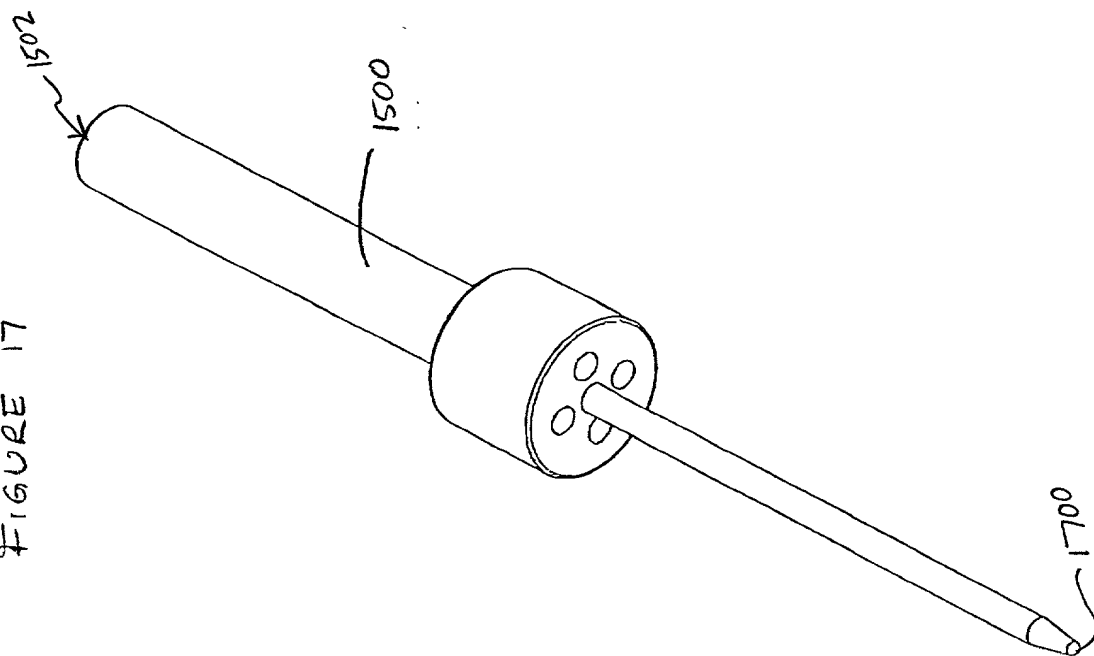
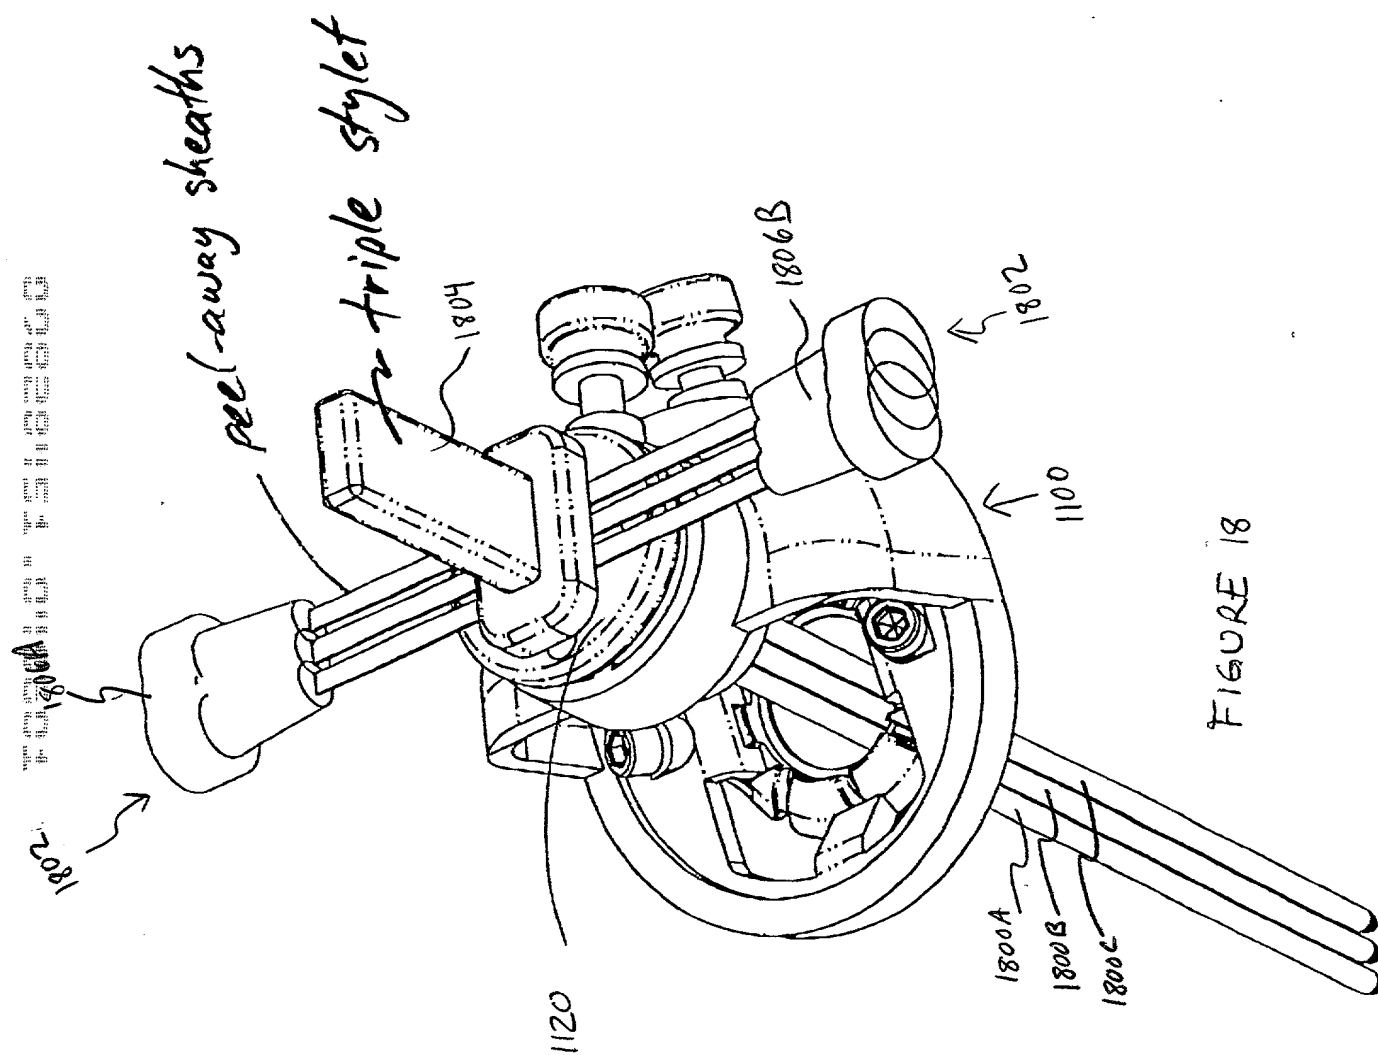


FIGURE 17





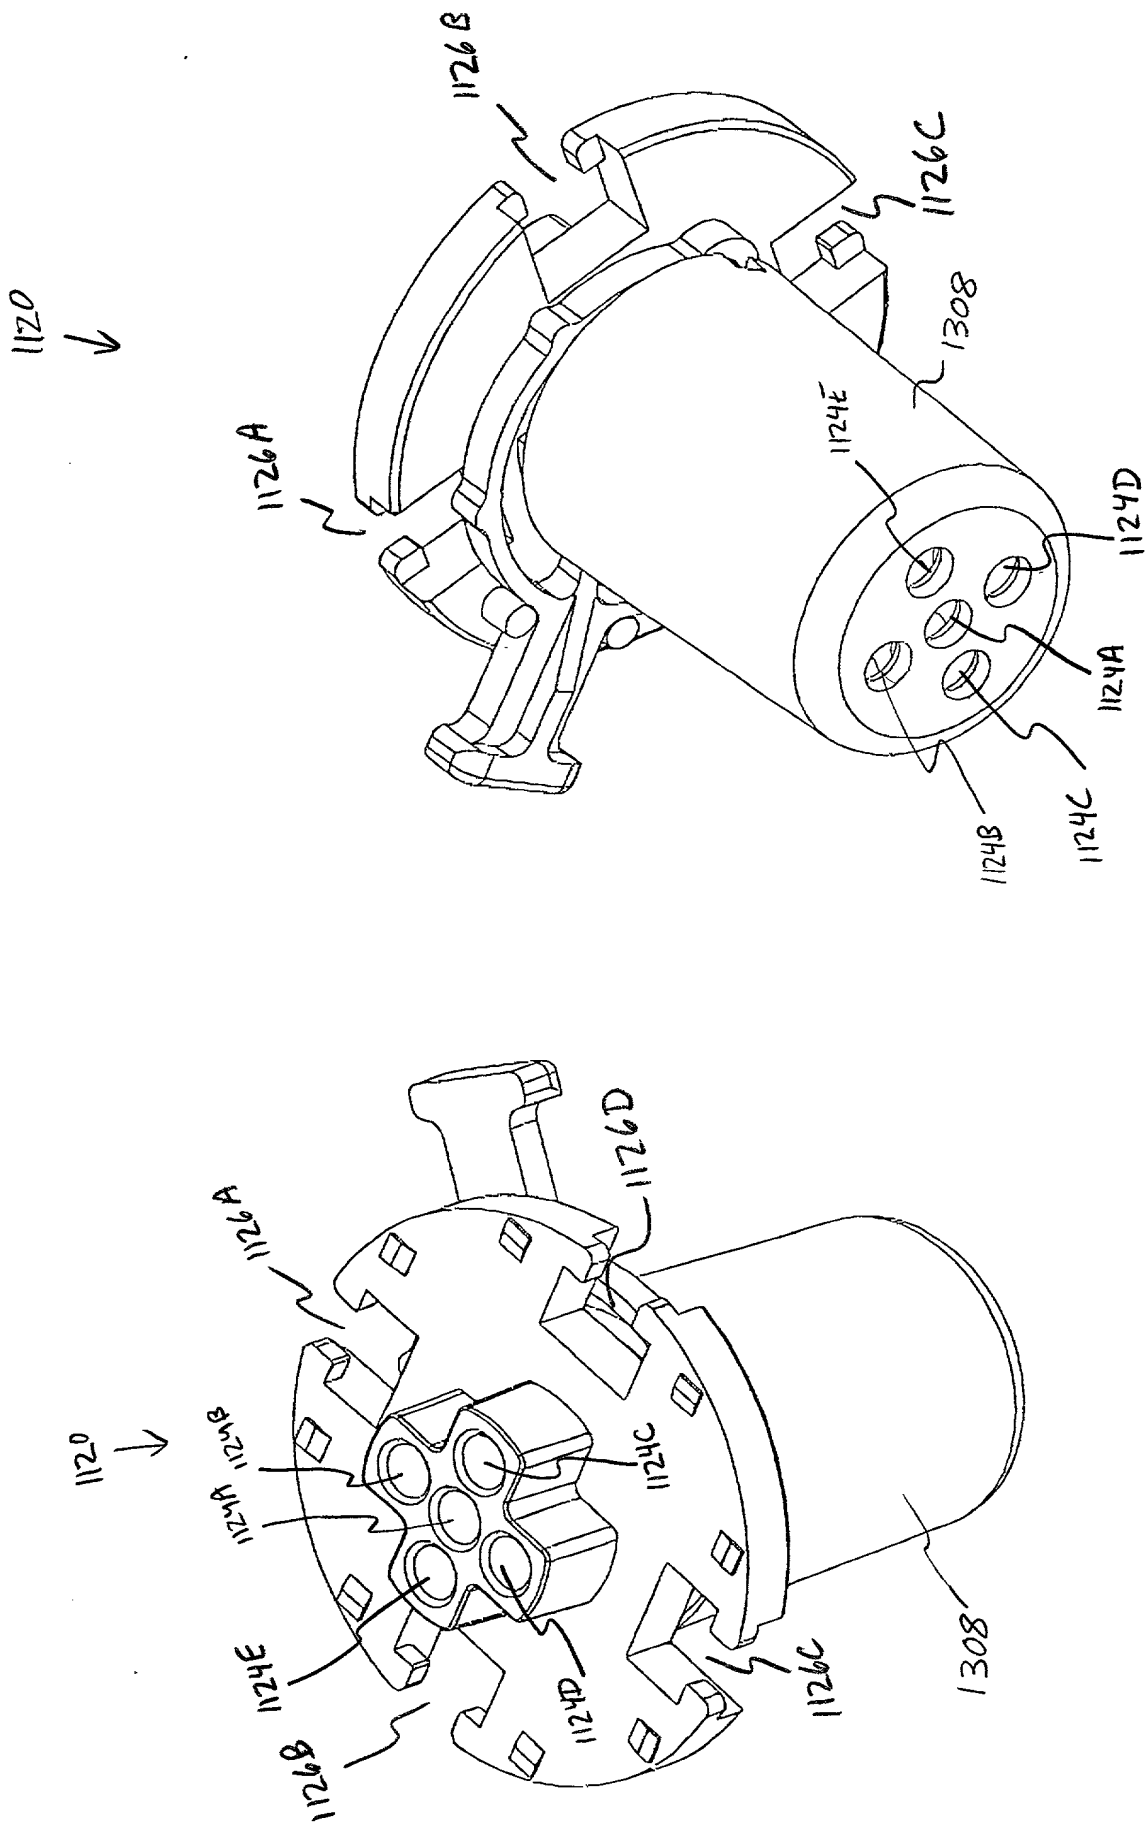
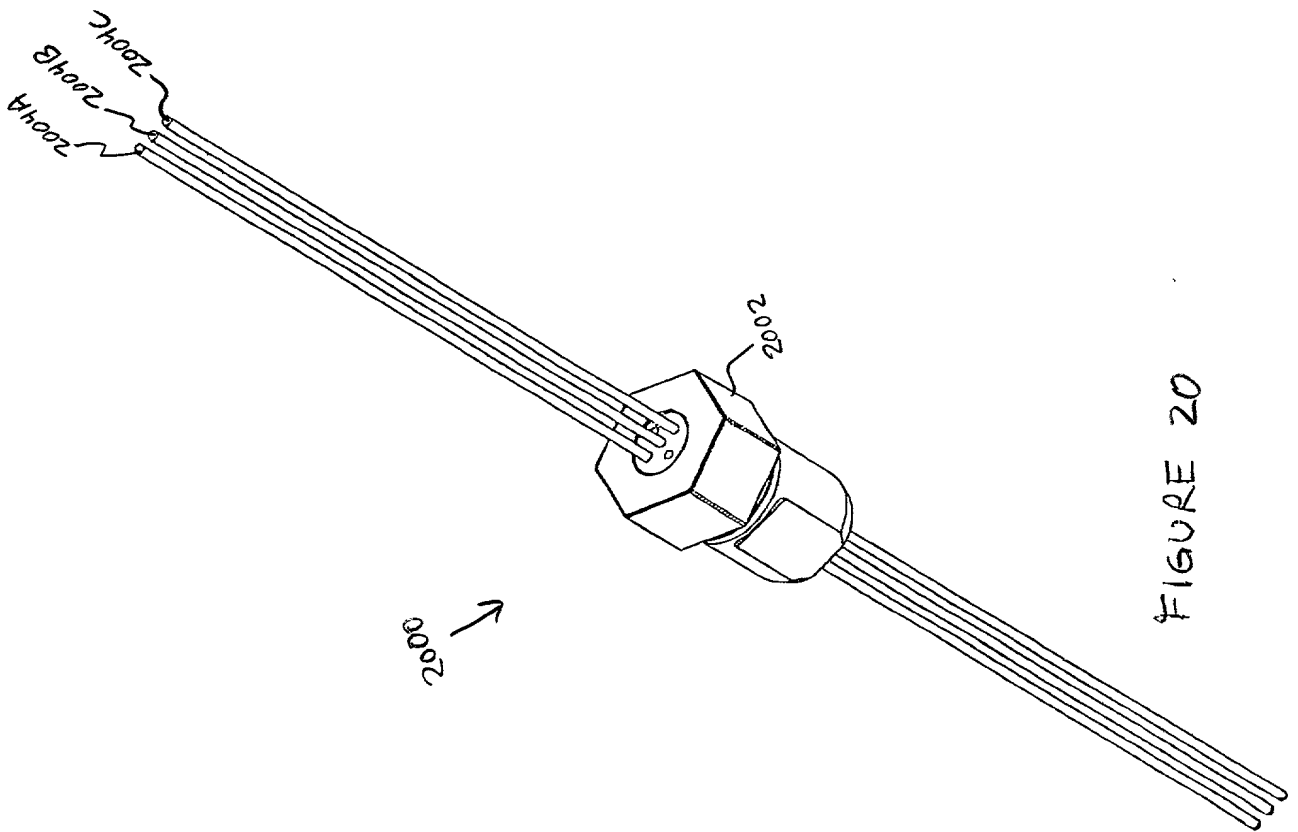
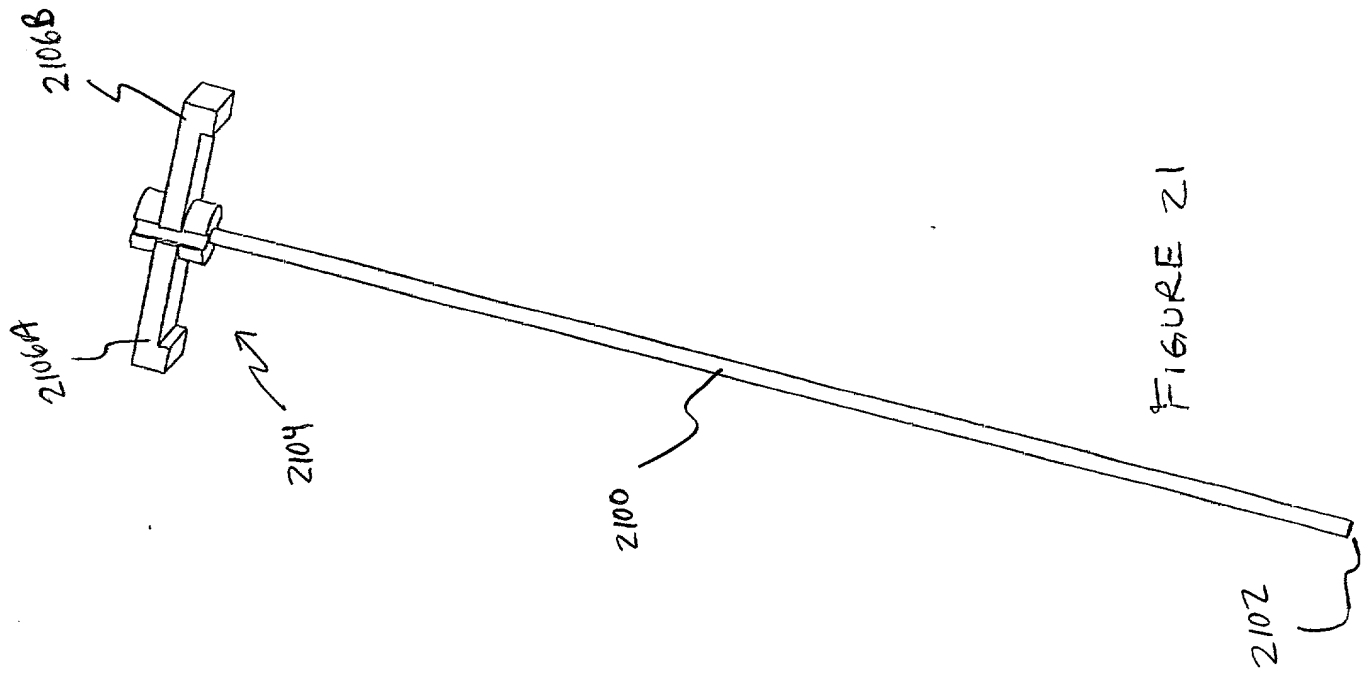


FIGURE 19



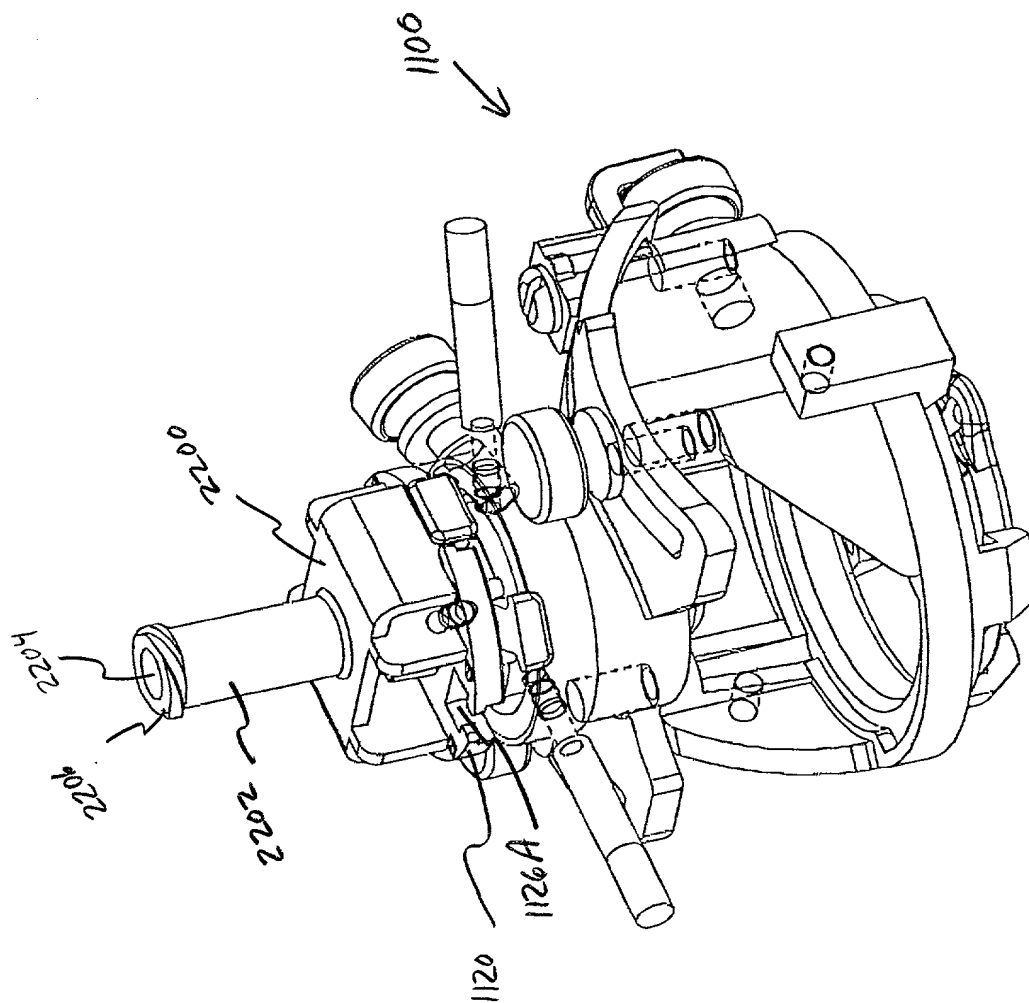


FIGURE 22

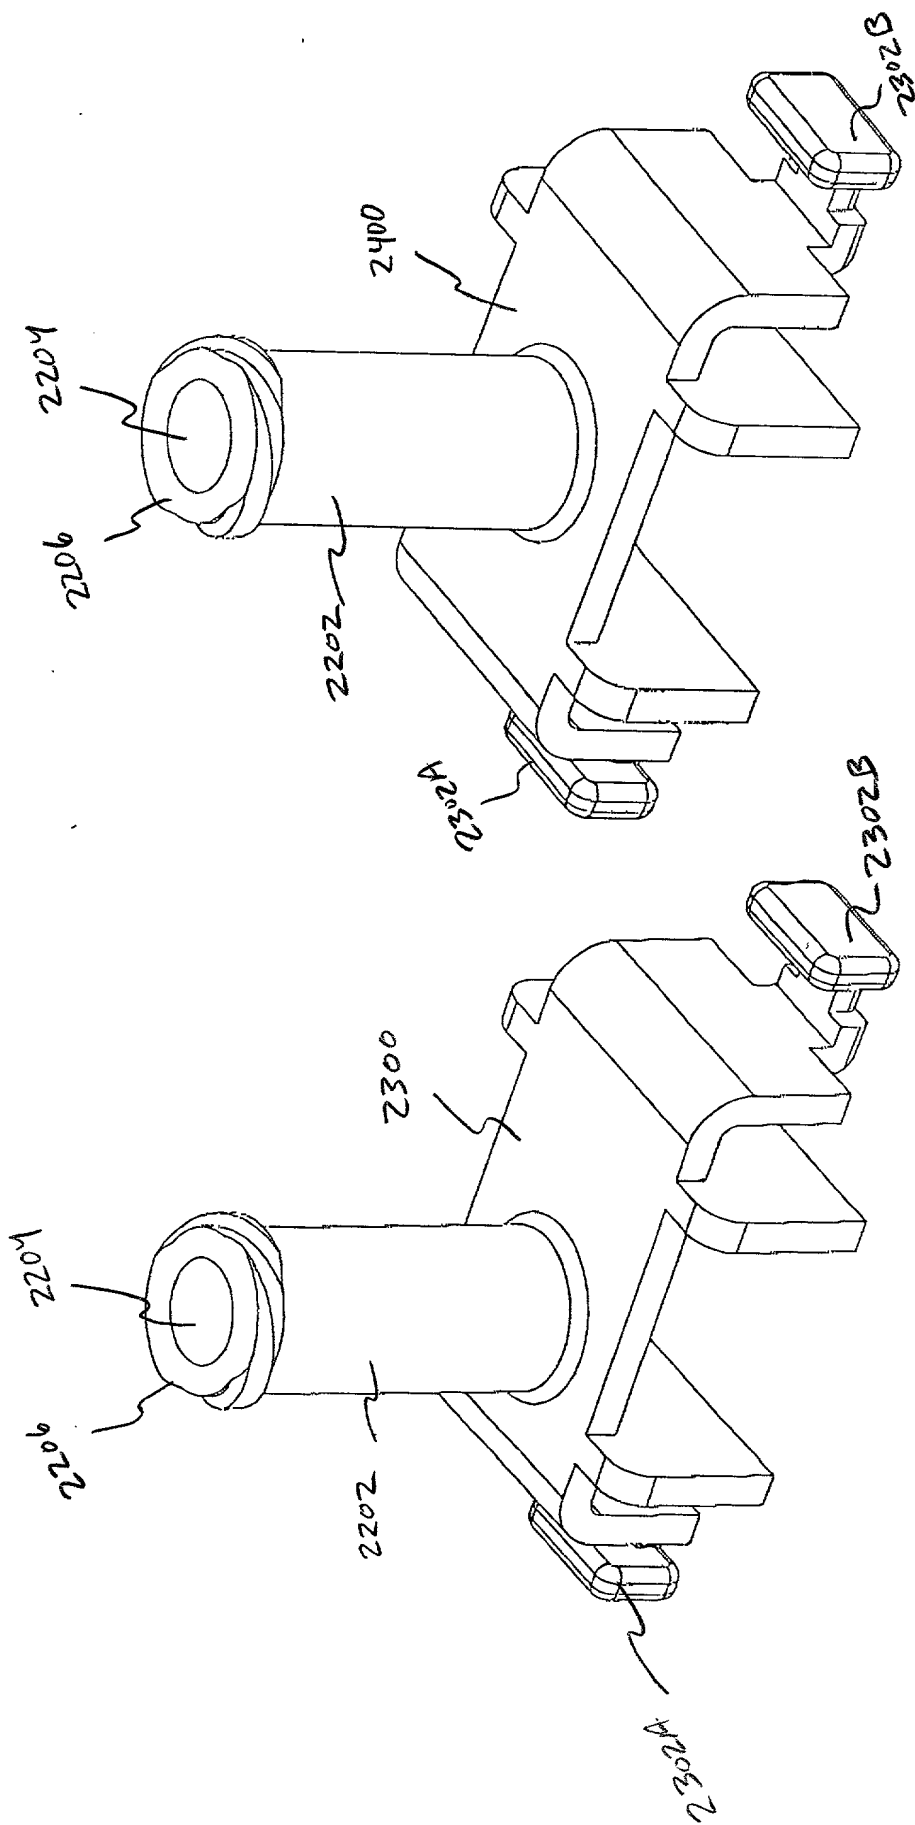


FIGURE 24

FIGURE 23



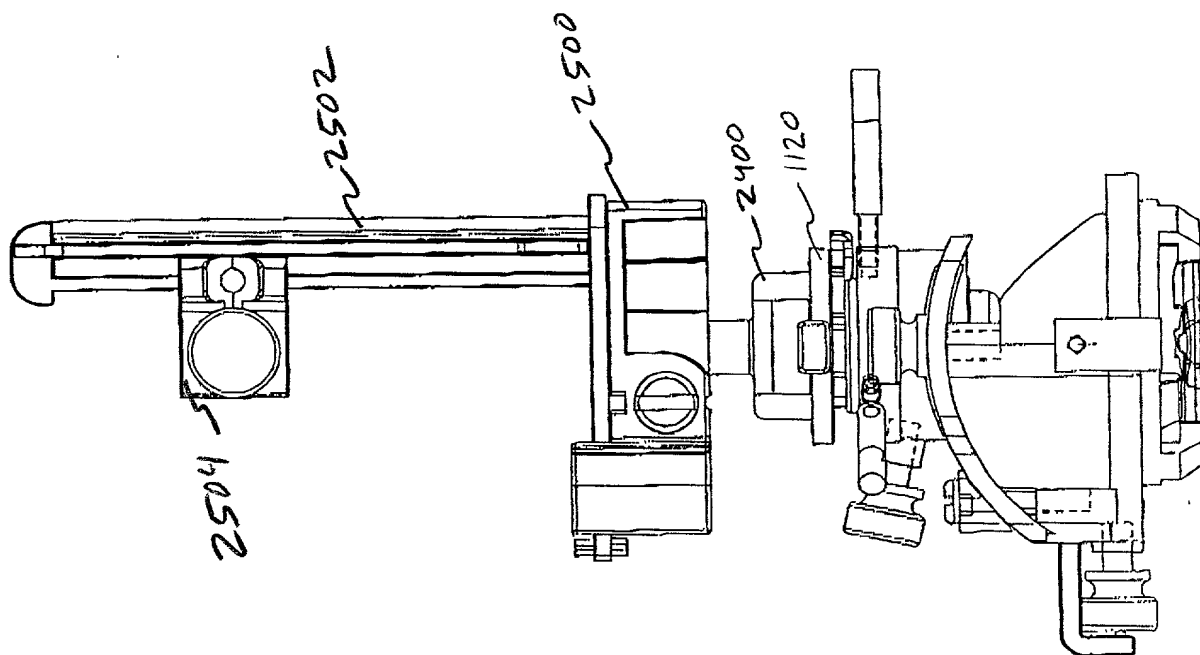
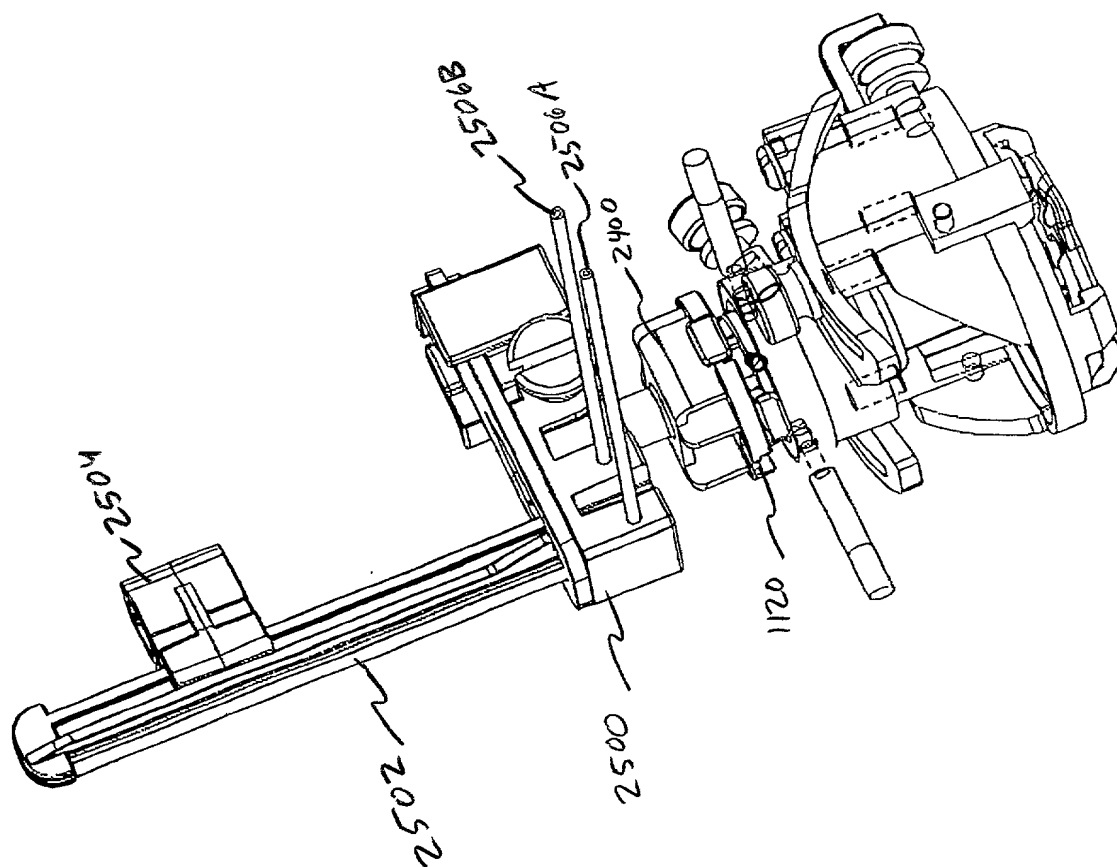


FIGURE 26



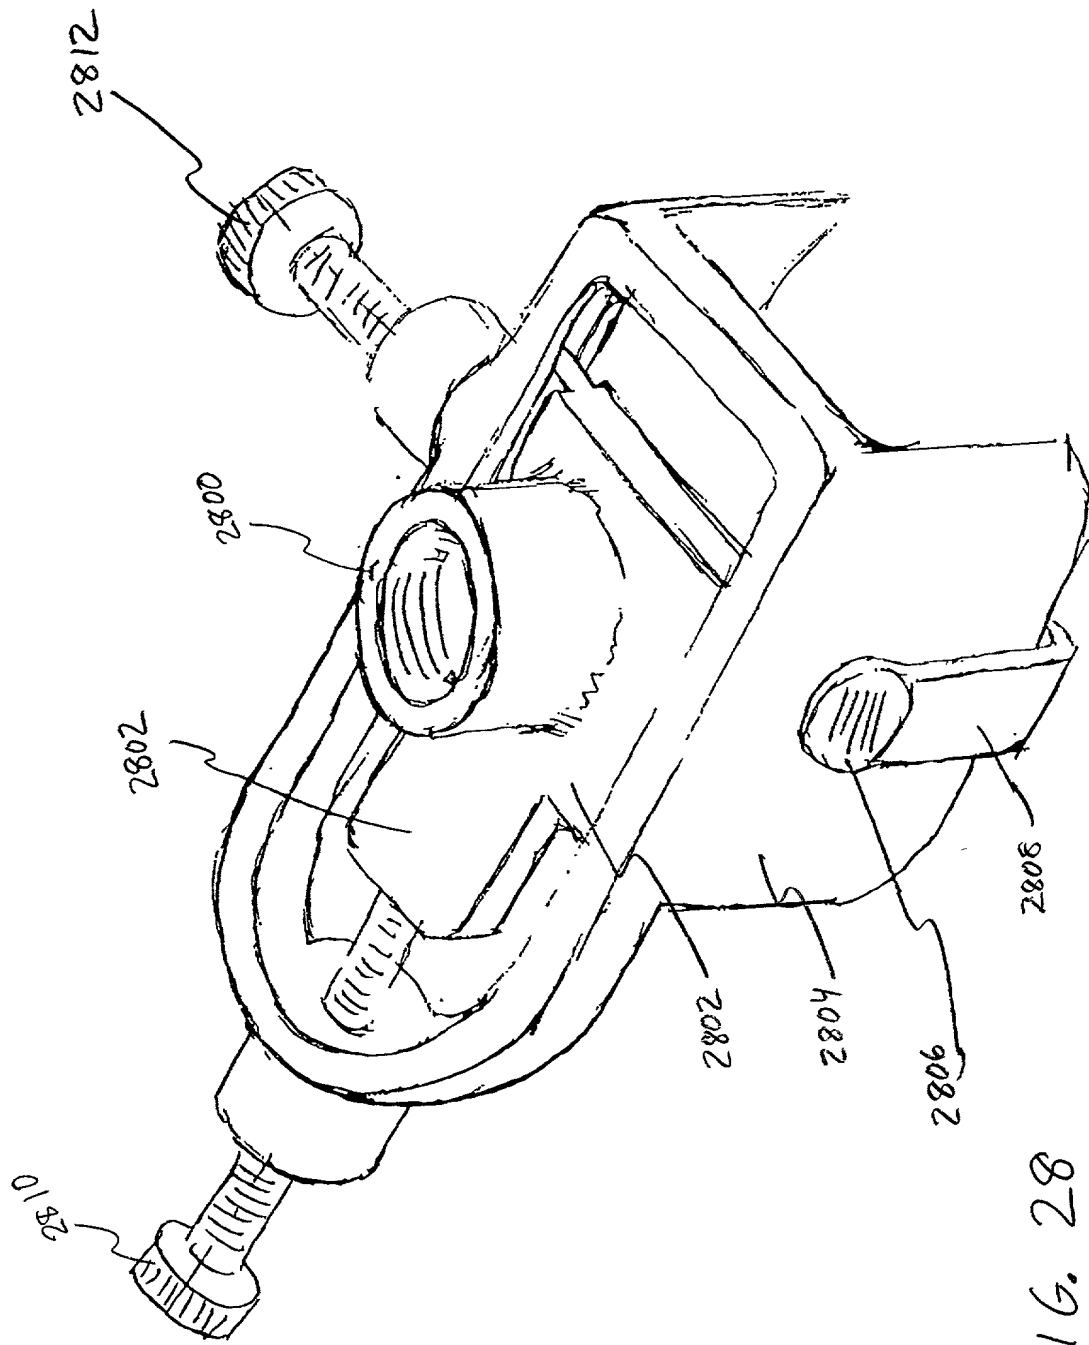
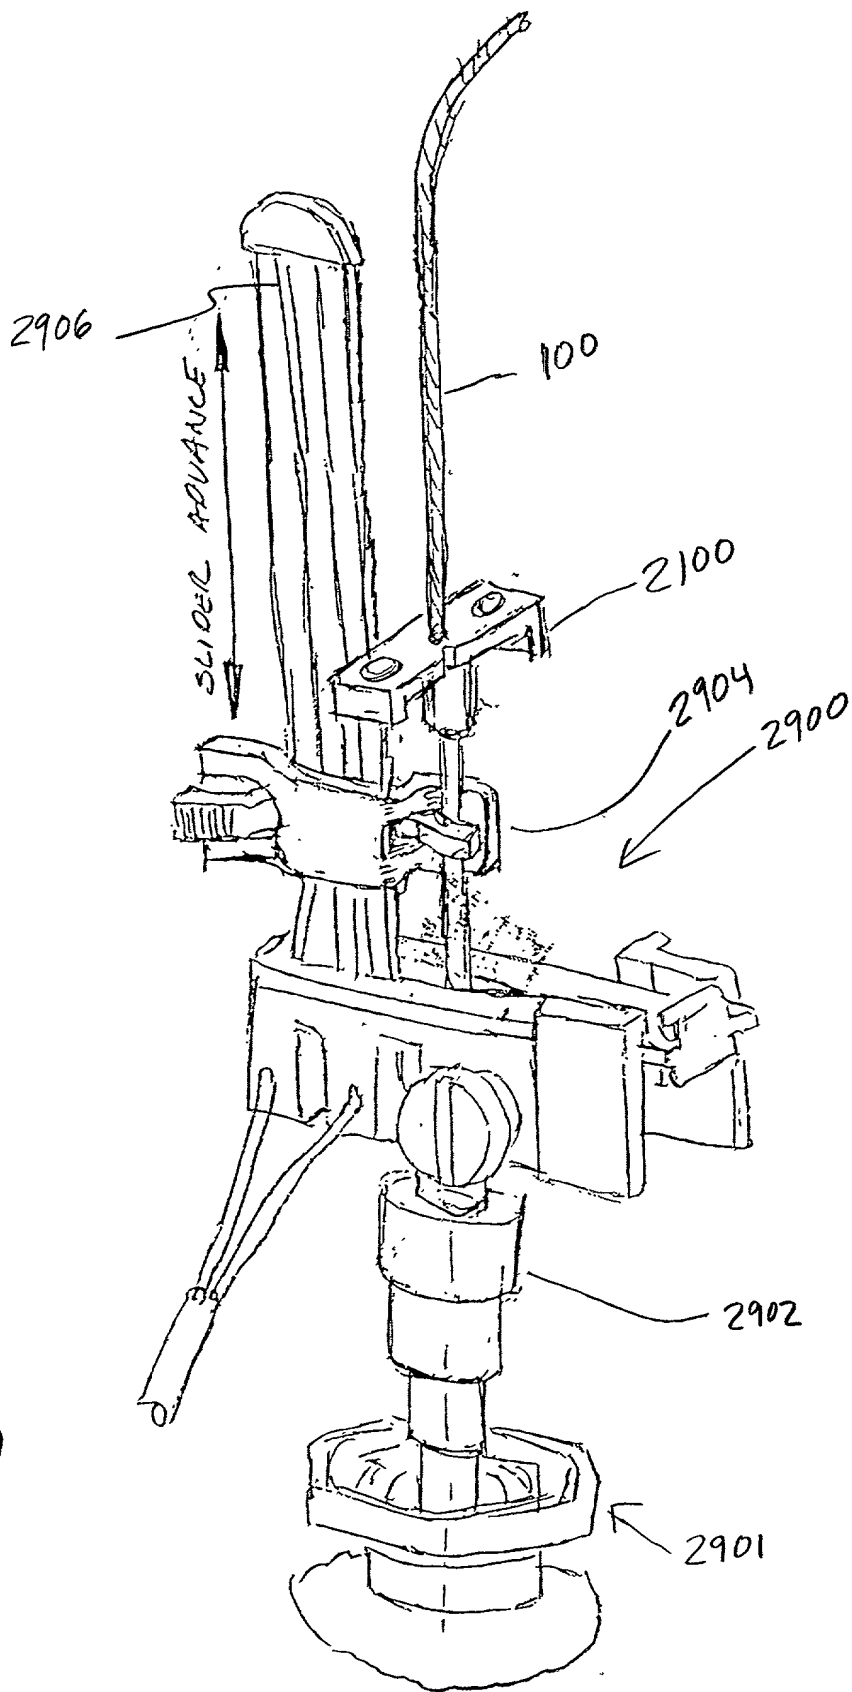


FIG. 28



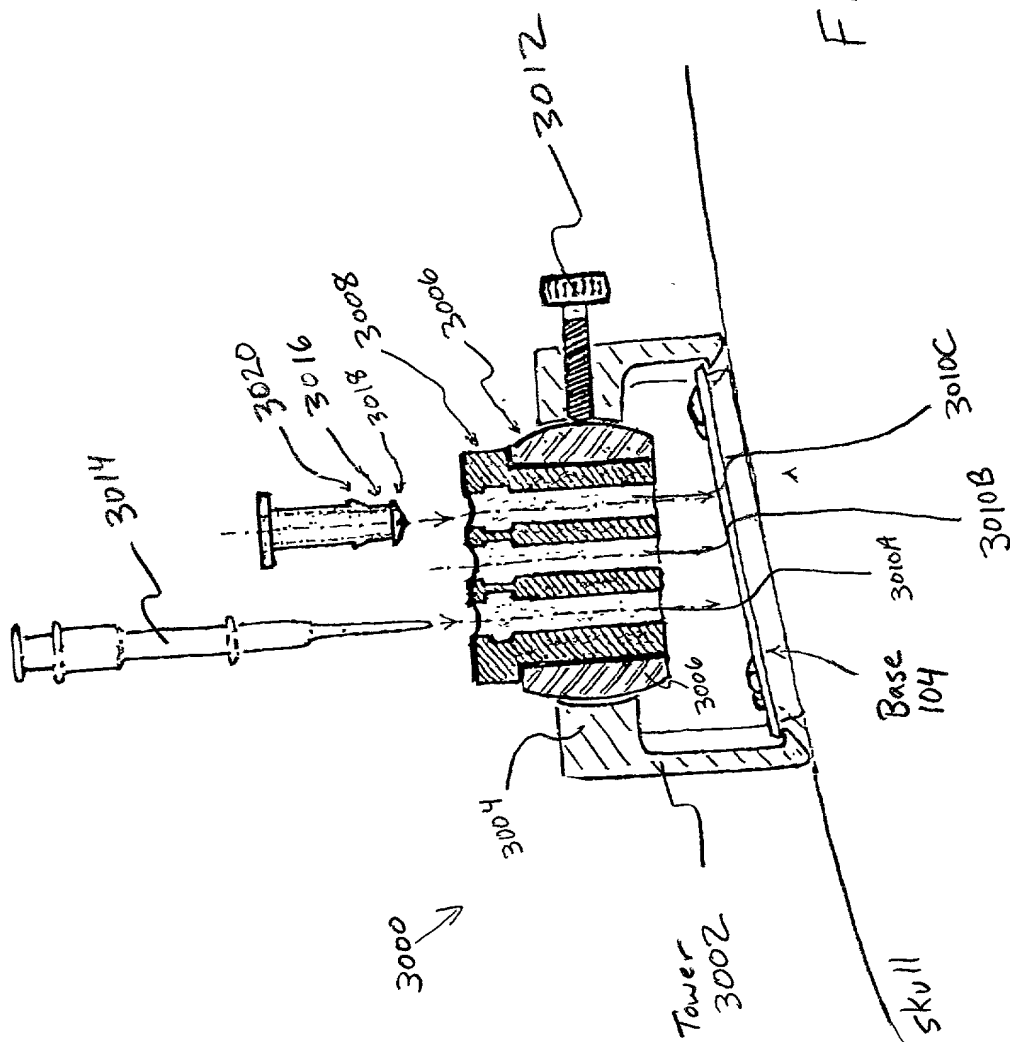


FIG. 30

FIG. 31

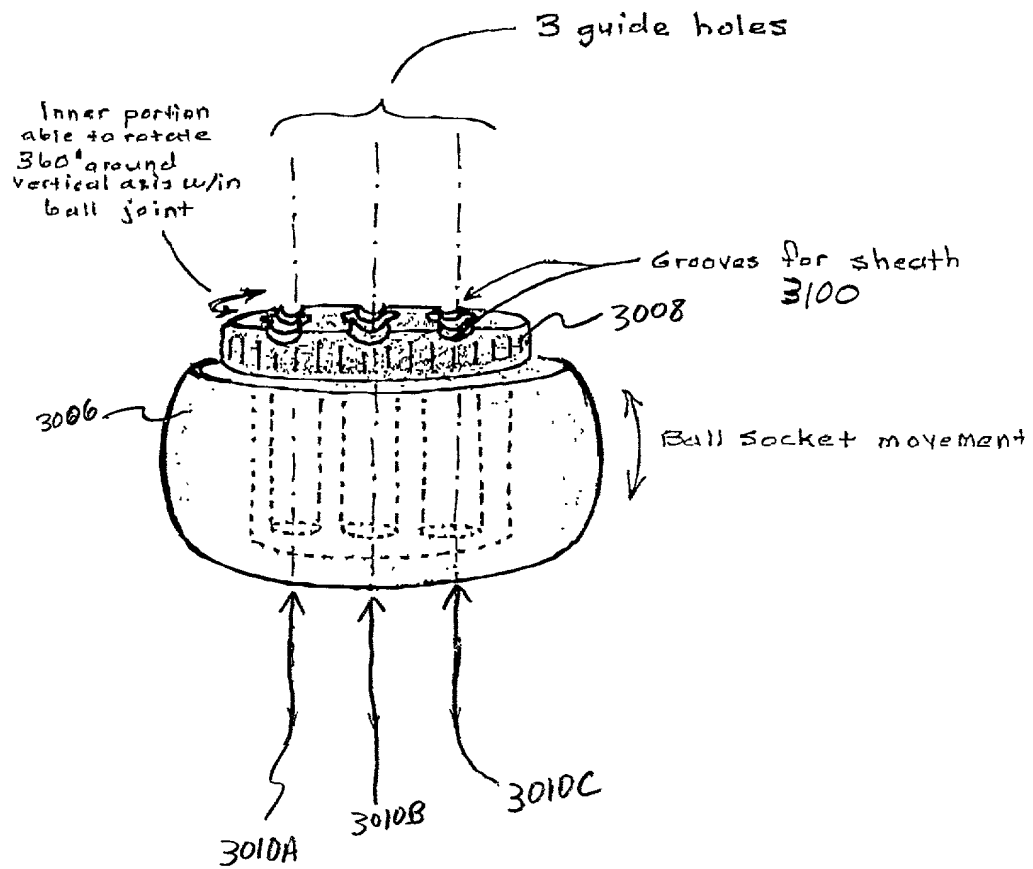
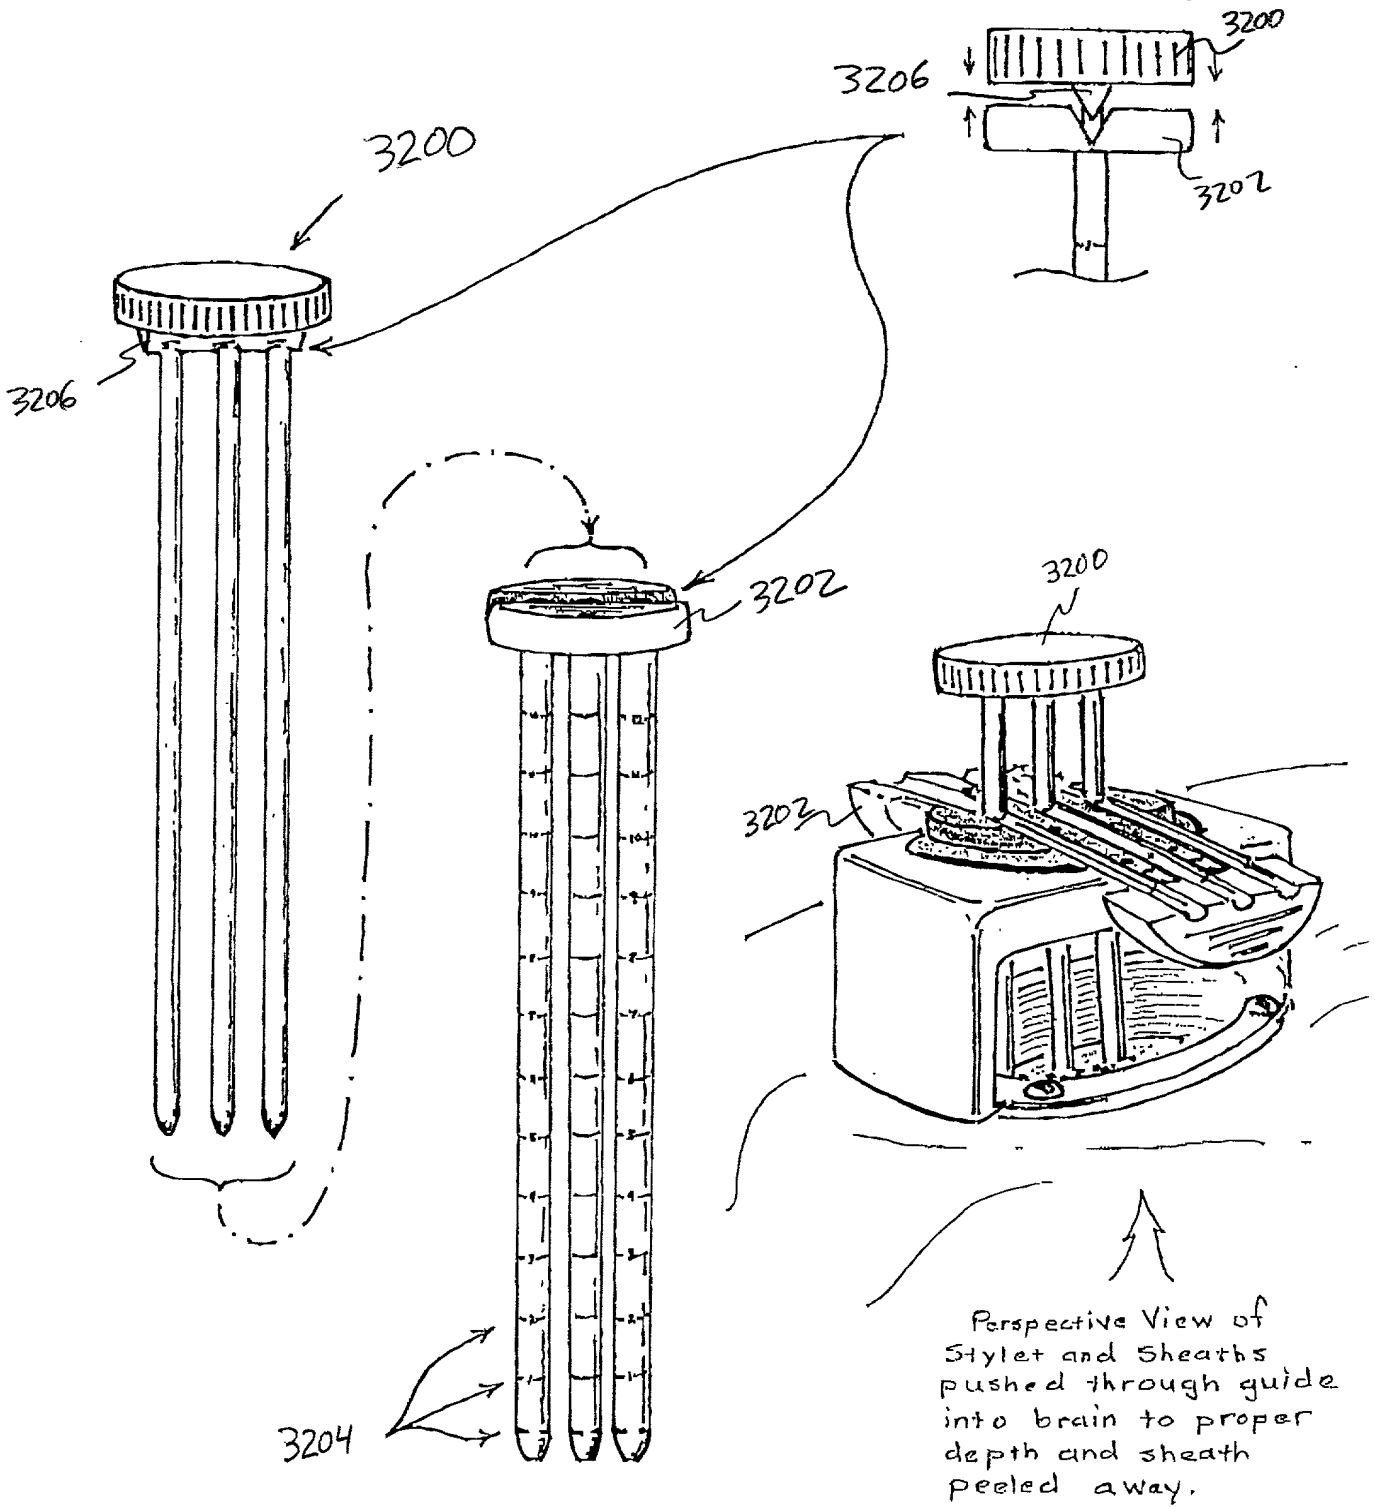


FIGURE 32

Side view of interface between stylet and sheath unit. Push together to initiate split of peel-away sheath.



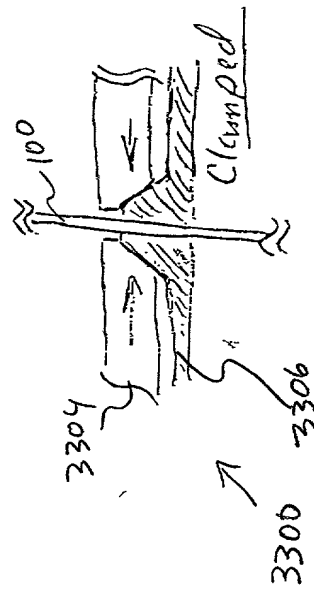
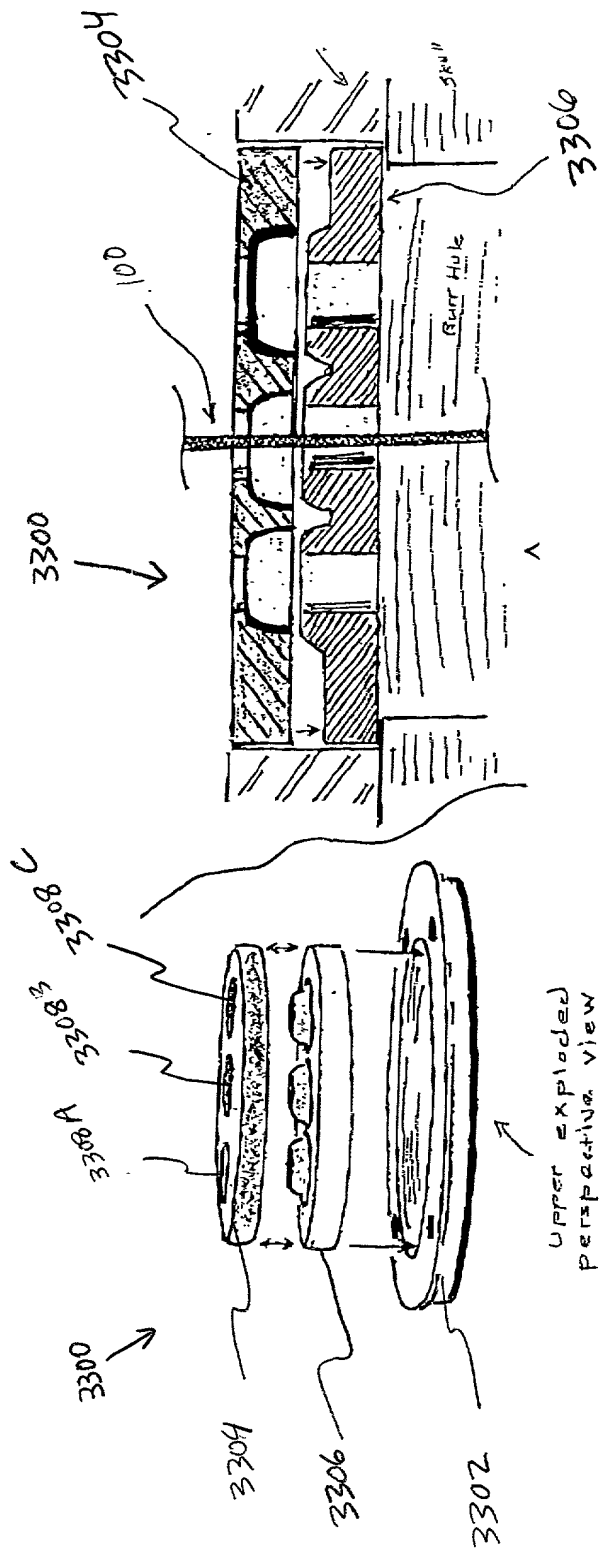
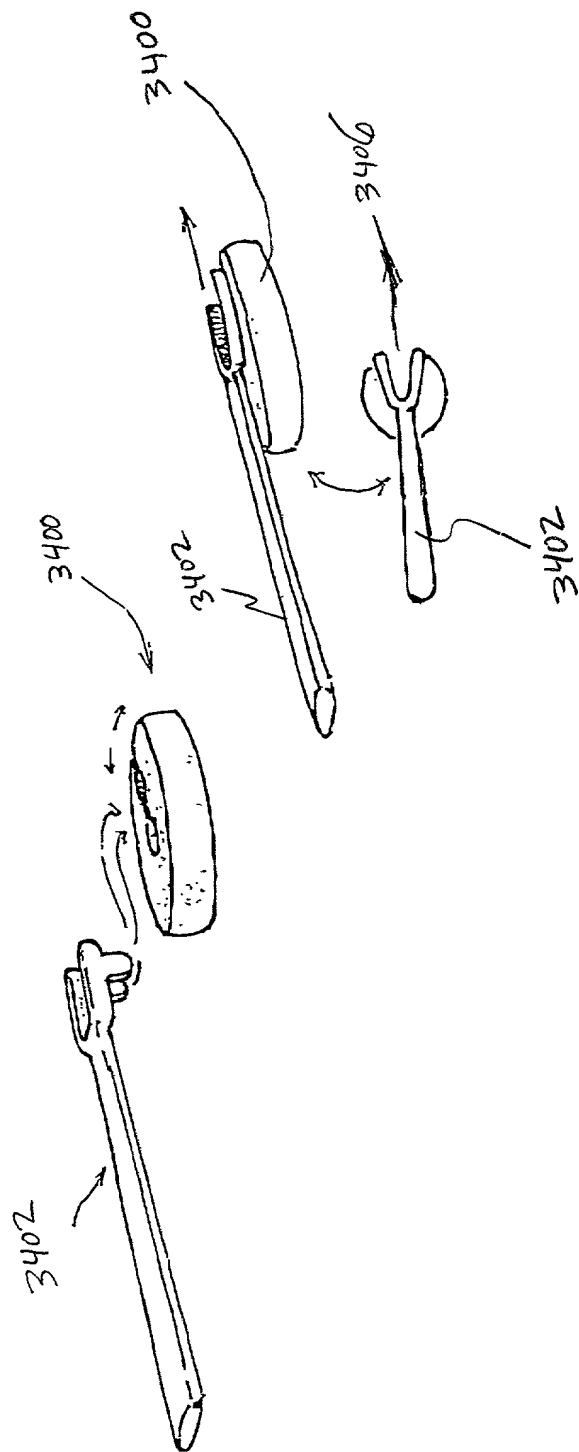




FIG. 34



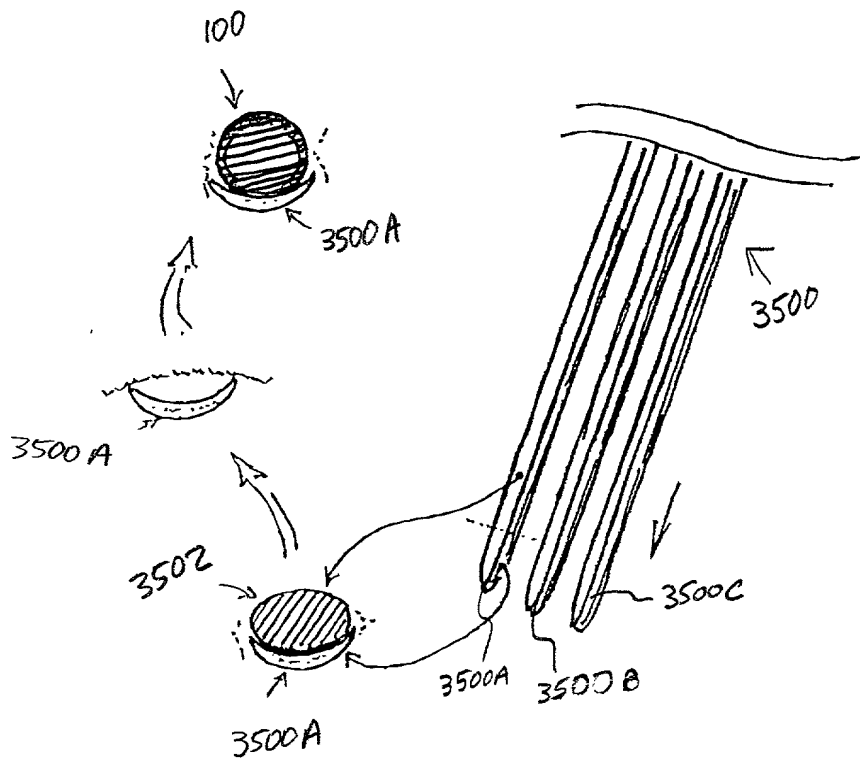


FIG. 35

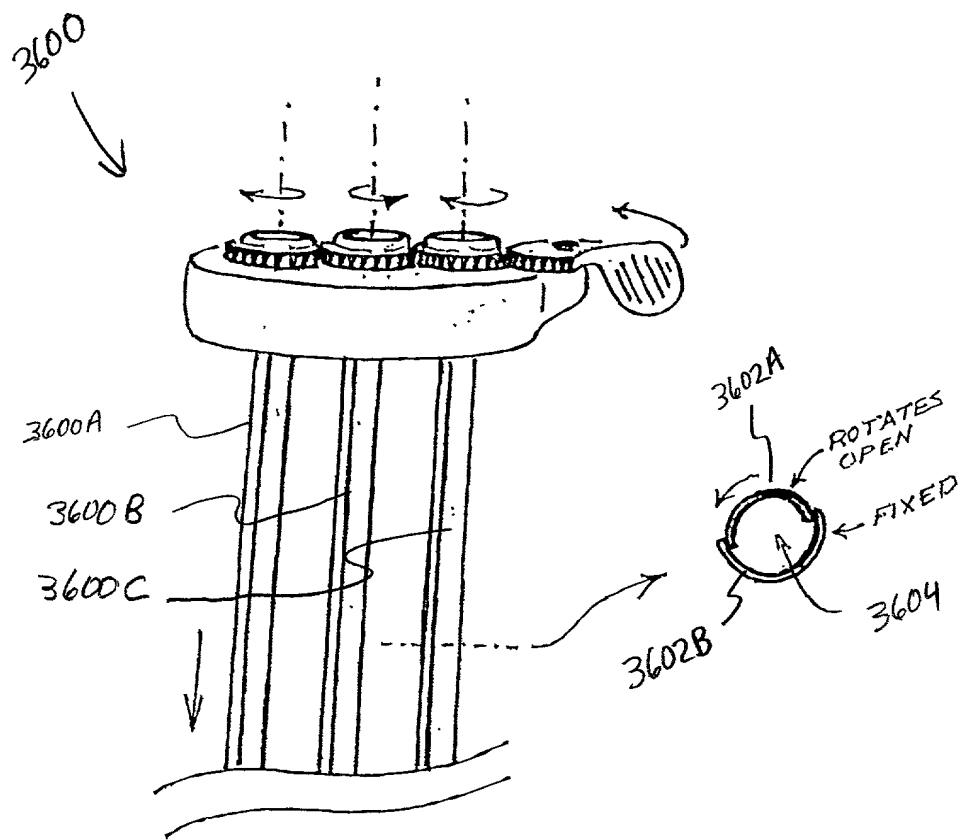


FIG. 36

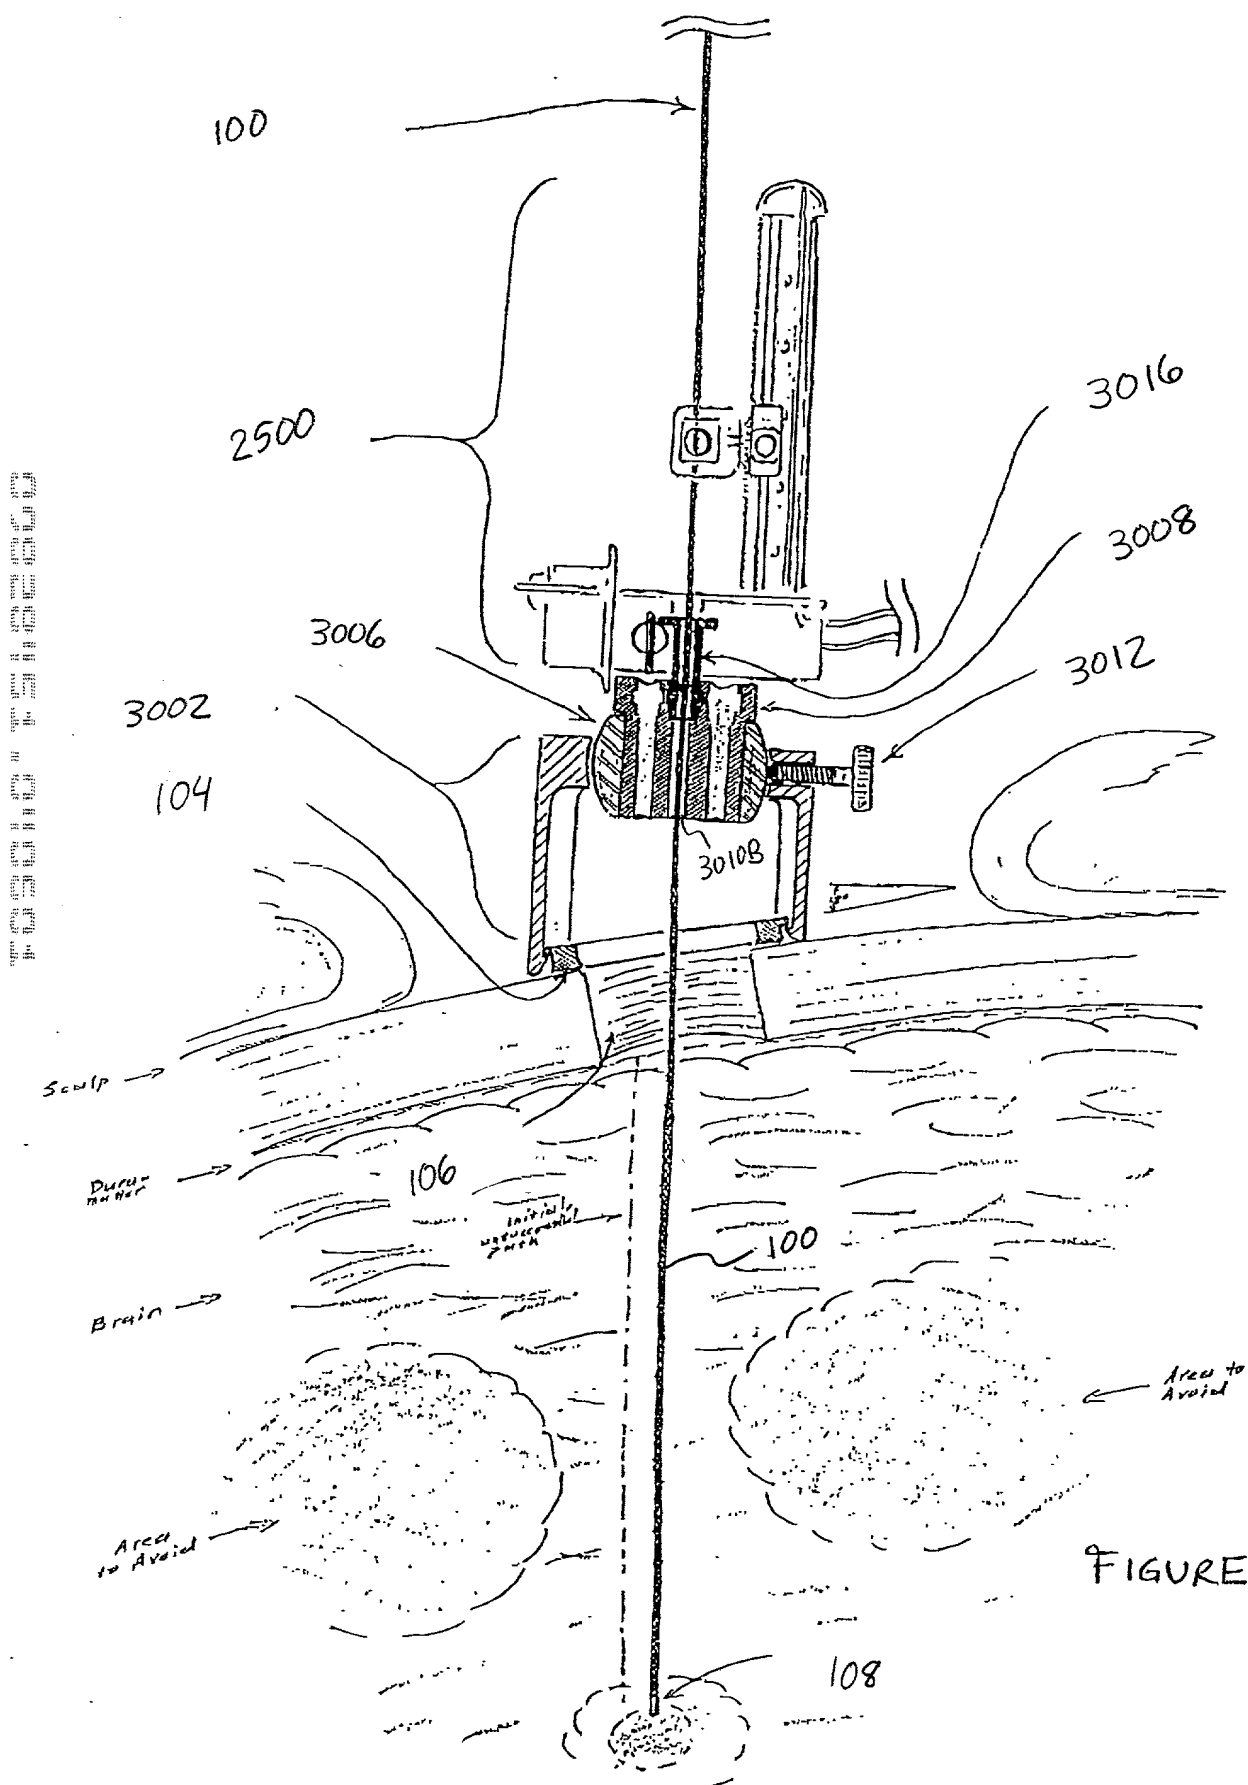


FIGURE 37

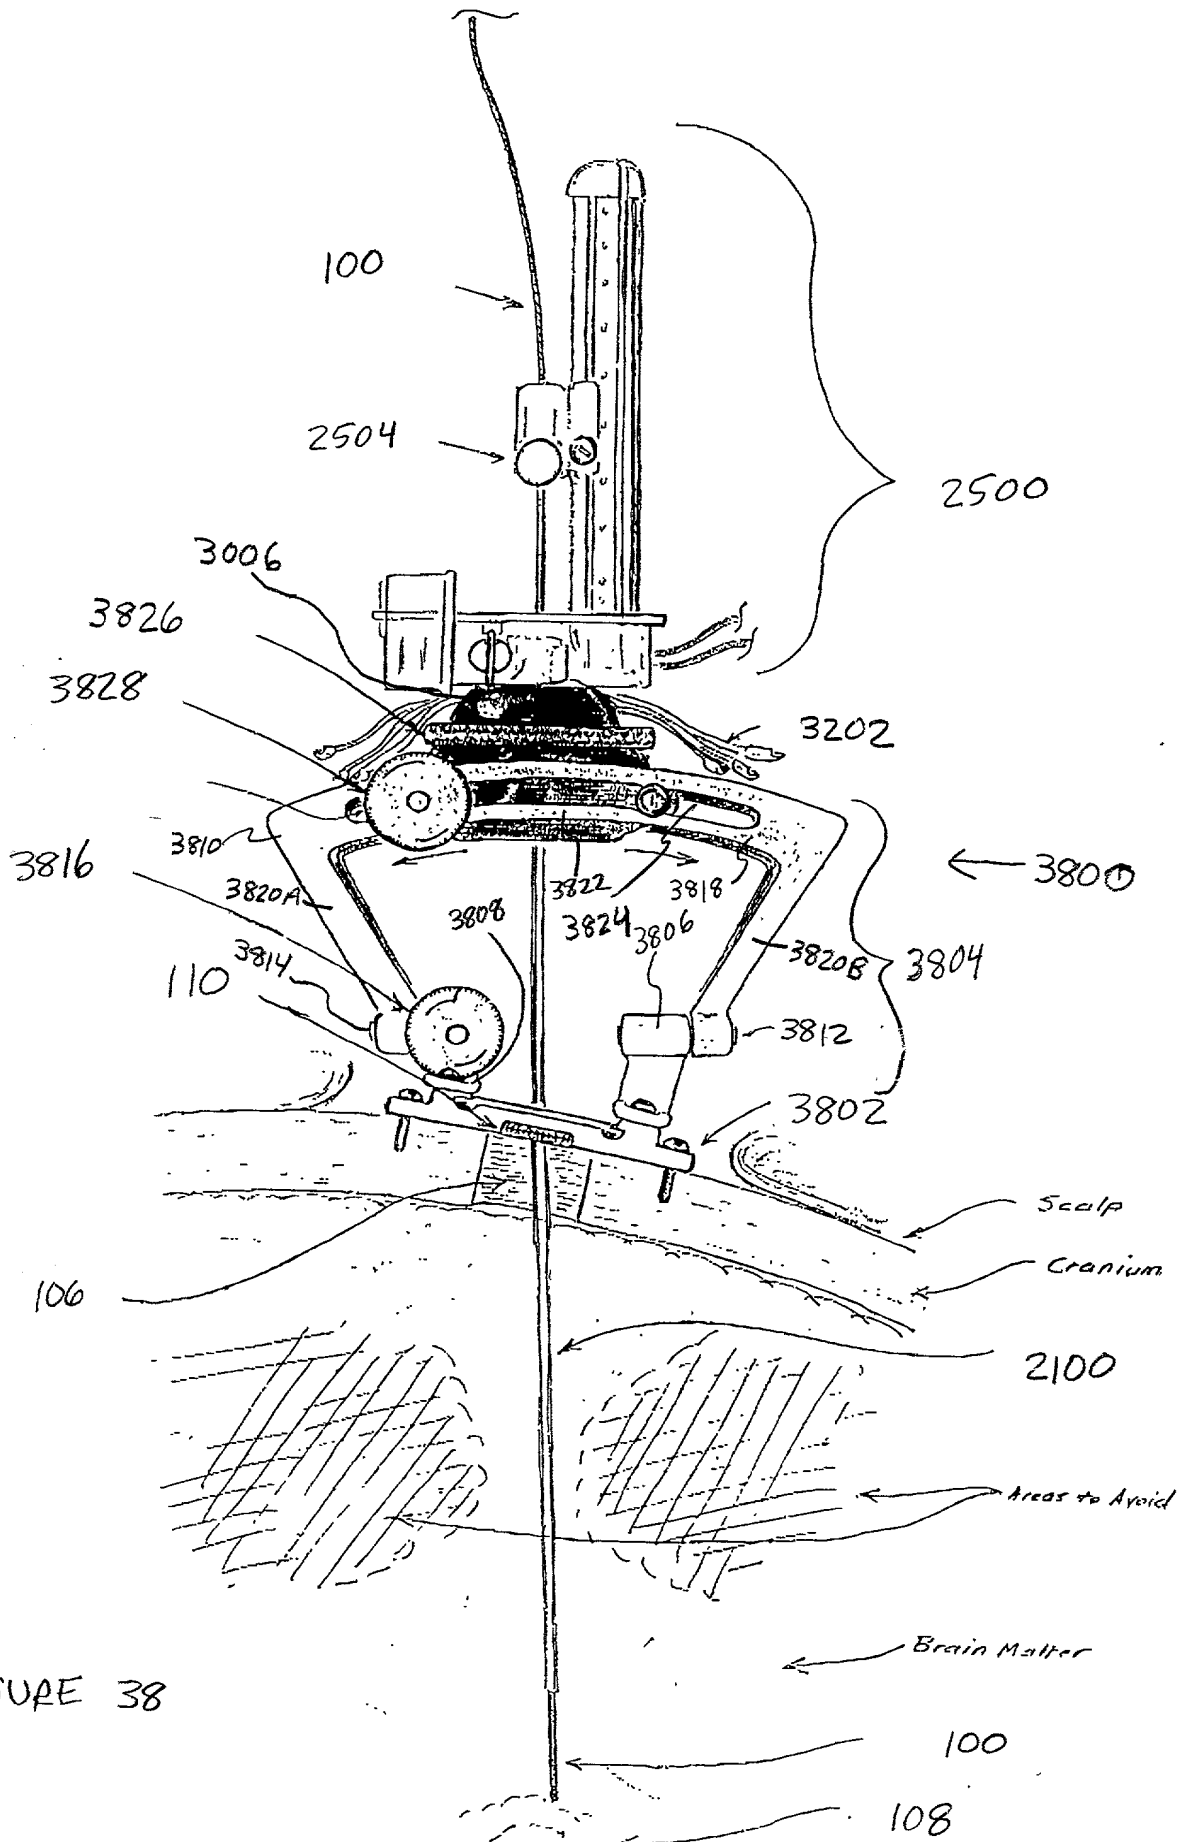


FIGURE 38

